

Preface

Copyright

This publication, including all photographs, illustrations and software, is protected under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without written consent of the author.

Version 1.0

Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

Trademark Recognition

Microsoft, MS-DOS and Windows are registered trademarks of Microsoft Corp.

MMX, Pentium, Pentium-II, Pentium-III, Celeron are registered trademarks of Intel Corporation.

Other product names used in this manual are the properties of their respective owners and are acknowledged.

Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment onto an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Shielded interconnect cables and a shielded AC power cable must be employed with this equipment to ensure compliance with the pertinent RF emission limits governing this device. Changes or modifications not expressly approved by the system's manufacturer could void the user's authority to operate the equipment.

Preface

Declaration of Conformity

This device complies with part 15 of the FCC rules. Operation is subject to the following conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

Canadian Department of Communications

This class B digital apparatus meets all requirements of the Canadian Interference-causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

About the Manual

The manual consists of the following:

Chapter 1	Describes features of the motherboard.
Introducing the Motherboard	Go to ➞ page 1
Chapter 2	Describes installation of motherboard components.
Installing the Motherboard	Go to ➞ page 9
Chapter 3	Provides information on using the BIOS Setup Utility.
Using BIOS	Go to ➞ page 29
Chapter 4	Describes the motherboard software
Using the Motherboard Software	Go to ➞ page 61
Chapter 5	Describes the eJIFFY setting up
Setting Up eJIFFY	Go to ➞ page 65
Chapter 6	Provides basic trouble shooting tips
Trouble Shooting	Go to ➞ page 77

TABLE OF CONTENTS

Preface	i
Chapter 1	1
Introducing the Motherboard	1
Introduction.....	1
Feature.....	2
Specifications.....	4
Motherboard Components.....	6
Chapter 2	9
Installing the Motherboard	9
Safety Precautions.....	9
Choosing a Computer Case.....	9
Installing the Motherboard in a Case.....	9
Checking Jumper Settings.....	10
<i>Setting Jumpers.....</i>	<i>10</i>
<i>Checking Jumper Settings.....</i>	<i>11</i>
<i>Jumper Settings.....</i>	<i>11</i>
Installing Hardware.....	12
<i>Installing the Processor.....</i>	<i>12</i>
<i>Installing Memory Modules.....</i>	<i>14</i>
<i>Expansion Slots.....</i>	<i>16</i>
<i>Connecting Optional Devices.....</i>	<i>18</i>
<i>Installing a SATA Hard Drive.....</i>	<i>22</i>
Connecting I/O Devices.....	23
Connecting Case Components.....	24
<i>Front Panel Header.....</i>	<i>27</i>
Chapter 3	29
Using BIOS	29
About the Setup Utility.....	29
<i>The Standard Configuration.....</i>	<i>29</i>
<i>Entering the Setup Utilities.....</i>	<i>29</i>
<i>Resetting the Default CMOS Values.....</i>	<i>30</i>
Using BIOS.....	30
<i>BIOS Navigation Key.....</i>	<i>31</i>
<i>Main Menu.....</i>	<i>31</i>
<i>Advanced Menu.....</i>	<i>32</i>
<i>Chipset Menu.....</i>	<i>44</i>
<i>M.I.B.III(MB Intelligent Bios III) Menu.....</i>	<i>51</i>
<i>Boot Menu.....</i>	<i>56</i>

<i>Security Menu</i>	57
<i>Save & Exit Menu</i>	58
<i>Updating the BIOS</i>	60

Chapter 4 **61**

Using the Motherboard Software **61**

About the Software DVD-ROM/CD-ROM.....	61
Auto-installing under Windows XP/Vista/7.....	61
<i>Running Setup</i>	62
Manual Installation.....	64
Utility Software Reference.....	64

Chapter 5 **65**

Setting Up eJIFFY **65**

Introduction.....	65
Installation and BIOS Setup.....	66
Entering eJIFFY.....	69
Features Icons.....	70
Usage FAQ.....	71

Chapter 6 **77**

Trouble Shooting **77**

Start up problems during assembly.....	77
Start up problems after prolong use.....	78
Maintenance and care tips.....	78
Basic Troubleshooting Flowchart.....	79

Chapter 1

Introducing the Motherboard

Introduction

Thank you for choosing the H61H2-M5 motherboard. This motherboard is a high performance, enhanced function motherboard designed to support the LGA1155 socket for 2nd Generation Intel® Core™ Family/Pentium®/Celeron® processors for high-end business or personal desktop markets.

This motherboard is based on Intel® H61 Chipset for best desktop platform solution. H61 is a single-chip, highly integrated, high performance Hyper-Threading peripheral controller, unmatched by any other single chip-device controller. This motherboard supports up to 8 GB of system memory with dual channel DDR3 1333/1066 SDRAM. High resolution graphics via PCI Express x16 slot, intended for Graphics Interface, is fully compliant to the PCI Express Base Specification revision 2.0. Three PCI Express slots are supported. It implements an EHCI (Enhanced Host Controller Interface) compliant interface that provides ten USB 2.0 ports (six USB 2.0 ports at the back panel and two USB 2.0 headers support additional four USB 2.0 ports). The gray USB 2.0 header provides optional EZ charger technology, please reference chapter 2 parts of Front Panel USB headers to check the detail information. In addition, H61H2-M5 implements extra USB 3.0 chip which provides two USB 3.0 ports* at rear I/O with blue connectors also.

The motherboard is equipped with advanced full set of I/O ports in the rear panel, including PS/2 mouse and PS/2 keyboard combo connector, one DVI(HDMI port optional) port, one D_sub (VGA) port, one Lan port, six USB 2.0 ports, two USB 3.0 ports, and audio jacks for microphone, line-in and line-out.

In addition, this motherboard supports four SATA 3Gb/s connectors for expansion.



**The USB 3.0 connectors are optimized for SuperSpeed USB 3.0 devices, aslo are fully backwards-compatible with Hi-Speed USB 2.0 devices.*

Feature

Processor

The motherboard uses an LGA1155 type of socket that carries the following features:

- Accommodates 2nd Generation Intel® Core™ Family / Pentium® / Celeron® processors
- Supports "Hyper-Threading" technology CPU
- One PCI Express x16 Gen2 port supporting up to 5 GB/s direction peak bandwidth

"Hyper-Threading" technology enables the operating system into thinking it's hooked up to two processors, allowing two threads to be run in parallel, both on separate "logical" processors within the same physical processor.

Chipset

The Intel H61 Chipset is a single-chip with proven reliability and performance.

- Support three PCI Express slots
- Integrated four SATA 3.0 Gb/s Host Controller
- Ten USB 2.0 ports supported
- Serial Peripheral Interface (SPI) support
- Integrated Graphics Support with PAVP 1.5
- Intel® High Definition Audio Controller

Memory

- Supports DDR3 1333/1066 DDR3 SDRAM with Dual-channel architecture
- Accommodates two unbuffered DIMMs
- Up to 4 GB per DIMM with maximum memory size up to 8 GB

Audio

- 5.1+2 Channel High Definition Audio Codec
- Meets Microsoft WLP3.x (Windows Logo Program) audio requirements
- All DACs supports 44.1k/48k/96k/192kHz sample rate
- Software selectable 2.5V/3.2V/4.0V VREFOUT
- Direct Sound 3D. compatible
- Power Support: Digital: 3.3V; Analog: 5.0V

Onboard LAN (Optional)

The onboard LAN provides the following features:

- | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Supports PCI Express™ 1.1 • Integrated 10/100/1000 transceiver • Wake-on-LAN and remote wake-up support |
| <ul style="list-style-type: none"> • Supports PCI Express™ 1.1 • Integrated 10/100 transceiver • Wake-on-LAN and remote wake-up support |

Expansion Options

The motherboard comes with the following expansion options:

- One PCI Express x16 slot for Graphic Interface
- Three PCI Express slots
- Four SATA connectors

Integrated I/O

The motherboard has a full set of I/O ports and connectors:

- One LAN port
- One D-sub (VGA) port
- One DVI port (HDMI Port optional)
- Six USB 2.0 ports
- Two USB 3.0 ports*
- One PS/2 keyboard and PS/2 mouse combo connector
- Audio jacks for microphone, line-in and 6-ch line-out



**The USB 3.0 connectors are optimized for SuperSpeed USB 3.0 devices, aslo are fully backwards-compatible with Hi-Speed USB 2.0 devices.*

BIOS Firmware

This motherboard uses AMI BIOS that enables users to configure many system features including the following:

- Power management
- Wake-up alarms
- CPU parameters
- CPU and memory timing
- Graphic parameters

The firmware can also be used to set parameters for different processor clock speeds.




1. Some hardware specifications and software items are subject to change without prior notice.
2. Due to chipset limitation, we recommend that motherboard be operated in the ambience between 0 and 50 ° C.

Specifications

CPU	<ul style="list-style-type: none"> LGA1155 socket for 2nd Generation Intel® Core™ Family/ Pentium®/Celeron® processors Supports “Hyper-Threading” technology CPU
Chipset	<ul style="list-style-type: none"> Intel® H61 Chipset
Memory	<ul style="list-style-type: none"> Dual-channel DDR3 memory architecture 2 x 240-pin DDR3 DIMM sockets support up to 8 GB Supports 1333/1066 DDR3 SDRAM
Expansion Slots	<ul style="list-style-type: none"> 1 x PCI Express x16 Gen2 slot 3 x PCI Express x1 Gen2 slots
Storage	<ul style="list-style-type: none"> Supported by Intel® H61 Express Chipset -4 x Serial ATA 3.0 Gb/s Host Controllers
Audio	<ul style="list-style-type: none"> Realtek ALC662 6-Ch HD audio CODEC Compliant with HD audio specification
LAN	<ul style="list-style-type: none"> Realtek RTL 8111E Gigabit Lan (Co-lay RTL8105E Lan)
Rear Panel I/O	<ul style="list-style-type: none"> 6 x USB 2.0 ports 2 x USB 3.0 ports 1 x DVI port (HDMI port optional) 1 x VGA port 1 x RJ45 LAN connector 1 x PS/2 keyboard & PS/2 mouse combo connector 1 x Audio port (Line in, microphone in, 6-ch line out)
Internal I/O Connectors & Headers	<ul style="list-style-type: none"> 1 x 24-pin ATX Power Supply connector 1 x 4-pin ATX Power Supply connector 1 x 4-pin CPU_FAN connector 1 x 3-pin SYS_FAN connector 1 x 3-pin PWR_FAN connector 4 x Serial SATA 3.0 Gb/s connectors 1 x Front panel switch/LED header 1 x Front panel audio header 2 x USB 2.0 headers support additional four USB 2.0 ports (F_USB1 supports optional EZ charger) 1 x Chassis intrusion header 1 x COM header 1 x SPDIF out header 1 x Speaker header 1 x Clear CMOS header 1 x LPT header 1 x TPM header

System BIOS	<ul style="list-style-type: none">• AMI BIOS with 32Mb SPI Flash ROM• Supports Plug and Play, STR (S3) / STD (S4), Hardware monitor• Supports Multi-Monitor technology• Supports ACPI & DMI• F7 hot key for boot up devices option• Audio, LAN can be disabled in BIOS
Form Factor	<ul style="list-style-type: none">• Micro ATX Size, 244mm x 200mm

Motherboard Components

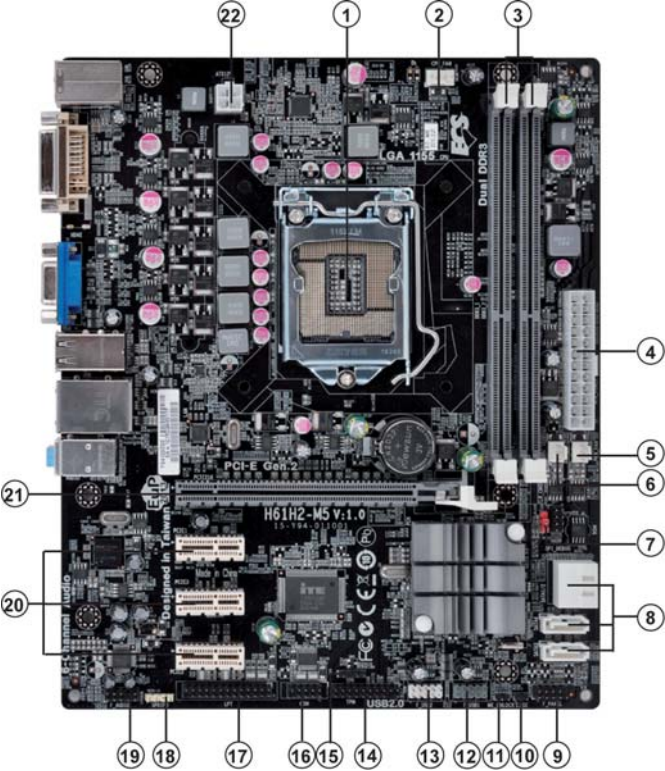

Introducing the Motherboard

Table of Motherboard Components

LABEL	COMPONENTS
1. CPU Socket	LGA1155 socket for 2 nd Generation Intel® Core™ Family/ Pentium® /Celeron® Processors
2. CPU_FAN	4-pin CPU cooling fan connector
3. DDR3_1~2	240-pin DDR3 SDRAM slots
4. ATX_POWER	Standard 24-pin ATX power connector
5. PWR_FAN	3-pin power cooling fan connector
6. SYS_FAN	3-pin system cooling fan connector
7. CLR_CMOS	Clear CMOS jumper
8. SATA1~4	Serial ATA 3.0 Gb/s connectors
9. F_PANEL	Front panel switch/LED header
10. CASE	CASE open header
11. ME_UNLOCK	ME unlock header-for factory use only
12. F_USB1	Front panel USB header (it supports EZ Charger) optional
13. F_USB2	Front panel USB header
14. TPM	Trusted Platform Module
15. SPK	Speaker header
16. COM	Onboard serial port header
17. LPT	Onboard parallel port header
18. SPDIFO	SPDIF out header
19. F_AUDIO	Front panel audio header
20. PCIE1~3	PCI Express x1 slot
21. PCIEX16	PCI Express slot for graphics interface
22. ATX12V	4-pin +12V power connector

This concludes Chapter 1. The next chapter explains how to install the motherboard.

Memo

Chapter 2

Installing the Motherboard

Safety Precautions

- Follow these safety precautions when installing the motherboard
- Wear a grounding strap attached to a grounded device to avoid damage from static electricity
- Discharge static electricity by touching the metal case of a safely grounded object before working on the motherboard
- Leave components in the static-proof bags they came in
- Hold all circuit boards by the edges. Do not bend circuit boards

Choosing a Computer Case

There are many types of computer cases on the market. The motherboard complies with the specifications for the micro ATX system case. Some features on the motherboard are implemented by cabling connectors on the motherboard to indicators and switches on the system case. Make sure that your case supports all the features required.

Most cases have a choice of I/O templates in the rear panel. Make sure that the I/O template in the case matches the I/O ports installed on the rear edge of the motherboard.


This motherboard carries a micro ATX form factor of 244 x 200 mm. Choose a case that accommodates this form factor.

Installing the Motherboard in a Case

Refer to the following illustration and instructions for installing the motherboard in a case.

Most system cases have mounting brackets installed in the case, which correspond the holes in the motherboard. Place the motherboard over the mounting brackets and secure the motherboard onto the mounting brackets with screws.

Ensure that your case has an I/O template that supports the I/O ports and expansion slots on your motherboard.

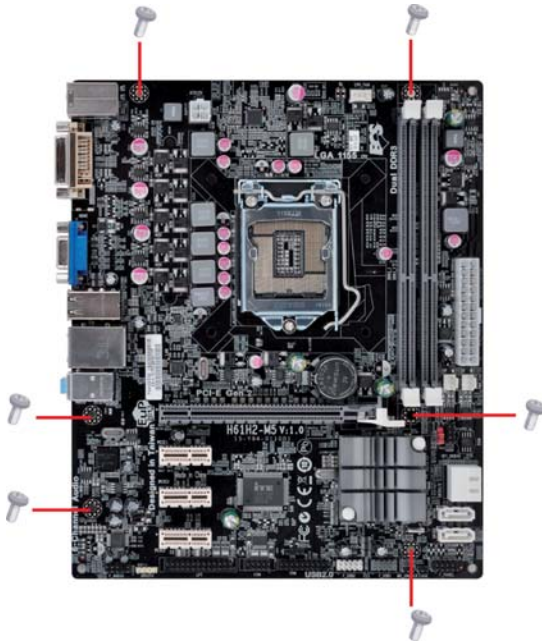

Do not over-tighten the screws as this can stress the motherboard.

Checking Jumper Settings

This section explains how to set jumpers for correct configuration of the motherboard.

Setting Jumpers

Use the motherboard jumpers to set system configuration options. Jumpers with more than one pin are numbered. When setting the jumpers, ensure that the jumper caps are placed on the correct pins.

The illustrations show a 2-pin jumper. When the jumper cap is placed on both pins, the jumper is **SHORT**. If you remove the jumper cap, or place the jumper cap on just one pin, the jumper is **OPEN**.




SHORT




OPEN

This illustration shows a 3-pin jumper. Pins 1 and 2 are **SHORT**.





Checking Jumper Settings

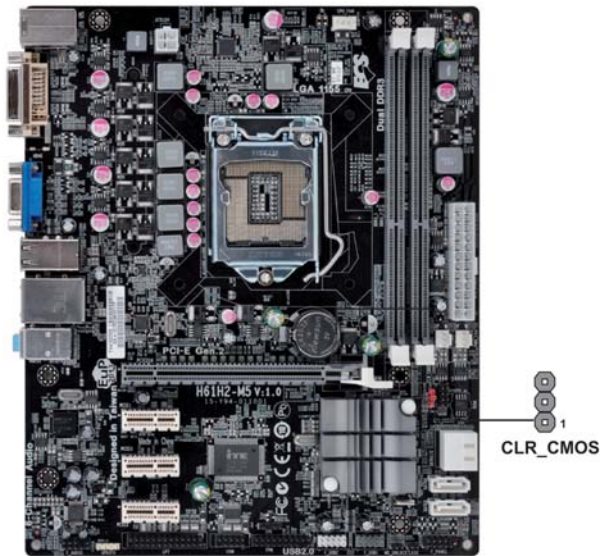The following illustration shows the location of the motherboard jumpers. Pin 1 is labeled.



Jumper Settings

Jumper	Type	Description	Setting (default)	
CLR_CMOS	3-pin	Clear CMOS	1-2: NORMAL 2-3: CLEAR Before clearing the CMOS, make sure to turn off the system.	 CLR_CMOS

 To avoid the system instability after clearing CMOS, we recommend users to enter the main BIOS setting page to “Load Default Settings” and then “Save and Exit Setup”.

Installing Hardware

Installing the Processor



Caution: When installing a CPU heatsink and cooling fan make sure that you DO NOT scratch the motherboard or any of the surface-mount resistors with the clip of the cooling fan. If the clip of the cooling fan scrapes across the motherboard, you may cause serious damage to the motherboard or its components.

On most motherboards, there are small surface-mount resistors near the processor socket, which may be damaged if the cooling fan is carelessly installed.

Avoid using cooling fans with sharp edges on the fan casing and the clips. Also, install the cooling fan in a well-lit work area so that you can clearly see the motherboard and processor socket.

Before installing the Processor

This motherboard automatically determines the CPU clock frequency and system bus frequency for the processor. You may be able to change the settings in the system Setup Utility. We strongly recommend that you do not over-clock processors or other components to run faster than their rated speed.



Warning:

1. Over-clocking components can adversely affect the reliability of the system and introduce errors into your system. Over-clocking can permanently damage the motherboard by generating excess heat in components that are run beyond the rated limits.

2. Always remove the AC power by unplugging the power cord from the power outlet before installing or removing the motherboard or other hardware components.

This motherboard has an LGA1155 socket. When choosing a processor, consider the performance requirements of the system. Performance is based on the processor design, the clock speed and system bus frequency of the processor, and the quantity of internal cache memory and external cache memory.

Fail-Safe Procedures for Over-clocking

When end-users encounter failure after attempting over-clocking, please take the following steps to recover from it.


1. Shut down the computer.
2. Press and hold the “Page Up Key (PgUp)” of the keyboard, and then boot the PC up.
3. Two seconds after the PC boots up, release the “Page Up Key (PgUp)”.
4. The BIOS returns to the default setting by itself.

Installing the Motherboard

CPU Installation Procedure

The following illustration shows CPU installation components.

- A. Opening of the Load Plate
 - Put your thumb on the tail of the load plate and press the tail down.
 - Rotate the load plate to fully open position.
- B. Disengaging of the Load Lever
 - Hold the hook of lever and pull it to the left side to clear retention tab.
 - Rotate the load lever to fully open position.
- C. Removing the Cap
 - Be careful not to touch the contact at any time.
- D. Inserting the Package
 - Grasp the package. Ensure to grasp on the edge of the substrate.
 - Make sure pin 1 indicator is on your bottom-left side.
 - Aim at the socket and place the package carefully into the socket by purely vertical motion.
- E. Closing the Load Plate
 - Rotate the load plate onto the package IHS (Intergraded Heat Spreader).
 - Engage the load lever while pressing down lightly onto the load plate.
 - Secure the load lever with the hook under retention tab.
- F. Fasten the cooling fan supporting base onto the CPU socket on the motherboard.
- G. Make sure the CPU fan is plugged to the CPU fan connector. Please refer to the CPU cooling fan user's manual for more detail installation procedure.



** For reference only*



- 1. To achieve better airflow rates and heat dissipation, we suggest that you use a high quality fan with 3800 rpm at least. CPU fan and heatsink installation procedures may vary with the type of CPU fan/ heatsink supplied. The form and size of fan/heatsink may also vary.
- 2. DO NOT remove the CPU cap from the socket before installing a CPU.
- 3. Return Material Authorization (RMA) requests will be accepted only if the motherboard comes with the cap on the LGA1155 socket.

Installing Memory Modules

This motherboard accommodates two memory modules. It can support two 240-pin DDR3 1333/1066. The total memory capacity is 8 GB.

DDR3 SDRAM memory module table

Memory module	Memory Bus
DDR3 1066	533 MHz
DDR3 1333	667 MHz

You must install at least one module in any of the two slots. Total memory capacity is 8 GB.




Do not remove any memory module from its antistatic packaging until you are ready to install it on the motherboard. Handle the modules only by their edges. Do not touch the components or metal parts. Always wear a grounding strap when you handle the modules.

Installation Procedure

Refer to the following to install the memory modules.

- 1 This motherboard supports unbuffered DDR3 SDRAM .
- 2 Push the latches on each side of the DIMM slot down.
- 3 Align the memory module with the slot. The DIMM slots are keyed with notches and the DIMMs are keyed with cutouts so that they can only be installed correctly.
- 4 Check that the cutouts on the DIMM module edge connector match the notches in the DIMM slot.
- 5 Install the DIMM module into the slot and press it firmly down until it seats correctly. The slot latches are levered upwards and latch on to the edges of the DIMM.
- 6 Install any remaining DIMM modules.

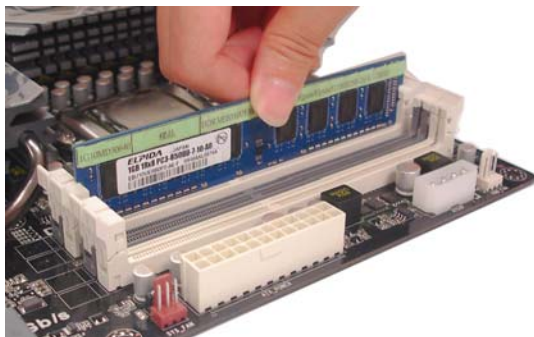


** For reference only*

Installing the Motherboard

Expansion Slots

Installing Add-on Cards

The slots on this motherboard are designed to hold expansion cards and connect them to the system bus. Expansion slots are a means of adding or enhancing the motherboard’s features and capabilities. With these efficient facilities, you can increase the motherboard’s capabilities by adding hardware that performs tasks that are not part of the basic system.

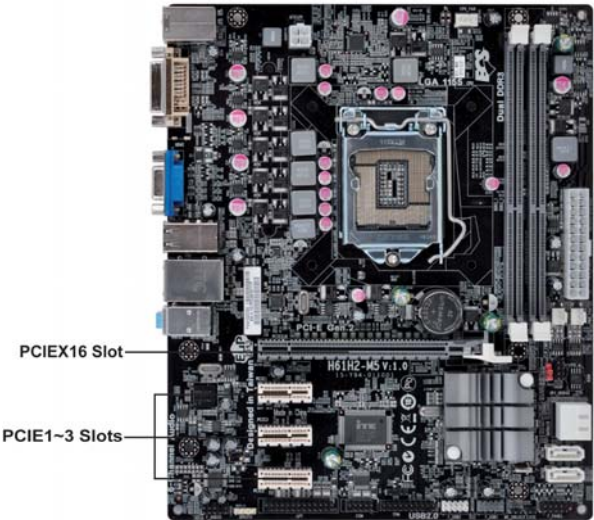

- PCIEX16 Slot** The PCI Express x16 slot is used to install an external PCI Express graphics card that is fully compliant to the PCI Express Base Specification revision 2.0.
- PCIEX1-3 Slots** The PCI Express x1 slots are fully compliant to the PCI Express Base Specification revision 2.0.



Before installing an add-on card, check the documentation for the card carefully. If the card is not Plug and Play, you may have to manually configure the card before installation.

Follow these instructions to install an add-on card:

- 1 Remove a blanking plate from the system case corresponding to the slot you are going to use.
- 2 Install the edge connector of the add-on card into the expansion slot. Ensure that the edge connector is correctly seated in the slot.
- 3 Secure the metal bracket of the card to the system case with a screw.




** For reference only*



1. For some add-on cards, for example graphics adapters and network adapters, you have to install drivers and software before you can begin using the add-on card.

Connecting Optional Devices

Refer to the following for information on connecting the motherboard’s optional devices:

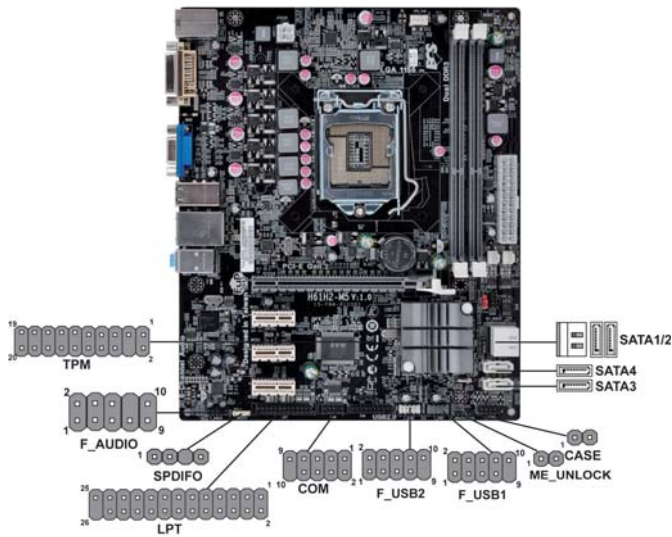

F_AUDIO: Front Panel Audio header

This header allows the user to install auxiliary front-oriented microphone and line-out ports for easier access.

Pin	Signal Name	Pin	Signal Name
1	PORT 1L	2	AUD_GND
3	PORT 1R	4	PRESENCE#
5	PORT 2R	6	SENSE1_RETURN
7	SENSE_SEND	8	KEY
9	PORT 2L	10	SENSE2_RETURN

SATA1~4: Serial ATA connectors

These connectors are used to support the Serial ATA 3.0Gb/s devices, simpler disk drive cabling and easier PC assembly. It eliminates limitations of the current Parallel ATA interface. But maintains register compatibility and software compatibility with Parallel ATA.

Pin	Signal Name	Pin	Signal Name
1	Ground	2	TX+
3	TX-	4	Ground
5	RX-	6	RX+
7	Ground	-	-

F_USB1~2: Front Panel USB headers



The motherboard has two USB 2.0 headers supporting four USB 2.0 ports. Additionally, some computer cases have USB ports at the front of the case. If you have this kind of case, use auxiliary USB connector to connect the front-mounted ports to the motherboard.

Unlike F_USB2 in this motherboard, F_USB1 supports EZ Charger technology (optional), provides 3 times current than general USB port in off mode for USB devices. It is useful and excellent, especially for the iPhone, iPad and iPod touch devices that need a large amount of current for faster recharging within less time.

Pin	Signal Name	Function
1	USBPWR	Front Panel USB Power
2	USBPWR	Front Panel USB Power
3	USB_FP_P0-	USB Port 0 Negative Signal
4	USB_FP_P1-	USB Port 1 Negative Signal
5	USB_FP_P0+	USB Port 0 Positive Signal
6	USB_FP_P1+	USB Port 1 Positive Signal
7	GND	Ground
8	GND	Ground
9	Key	No pin
10	NC	Not connected



Please make sure that the USB cable has the same pin assignment as indicated above. A different pin assignment may cause damage or system hang-up.

TPM (Optional): TPM module header

Trusted Platform Module (TPM) is a published specification detailing a microcontroller that can store secured information, and implementations of that specification.

Pin	Signal Name	Pin	Signal Name
1	TPM_CLK	11	LAD0
2	GND	12	GND
3	LFRAME#	13	RESERVE0
4	KEY	14	RESERVE1
5	LREST#	15	VCC3_DUAL
6	SMBDATA	16	SERIRQ
7	LAD3	17	GND
8	LAD2	18	GND
9	VCC3	19	LPCPD#
10	LAD1	20	SMBCLK

SPDIFO: SPDIF out header

This is an optional header that provides an SPDIFO (Sony/Philips Digital Interface) output to digital multimedia device through optical fiber or coaxial connector.

Pin	Signal Name
1	SPDIFOUT
2	VCC
3	KEY
4	GND

CASE: Chassis Intrusion Detect Header

This detects if the chassis cover has been removed. This function needs a chassis equipped with intrusion detection switch and needs to be enabled in BIOS.

Pin 1-2	Function
Short	Chassis cover is removed
Open	Chassis cover is closed

ME_UNLOCK: ME Unlock Header

Pin 1-2	Function
Short	Unlock
Open	Lock

COM: Onboard serial port header

Connect a serial port extension bracket to this header to add a serial port to your system.

Pin	Signal Name	Function
1	DCDB	Data Carrier Detect
2	SINB	Serial Input
3	SOUTB	UART B Serial Output
4	DTRB	UART B Data Terminal Ready
5	GND	Ground
6	DSRB	Data Set Ready
7	RTSB	RART B Request to Send
8	CTSB	Clear to Send
9	RI	Ring Indicator
10	Key	No pin

LPT: Onboard parallel port header

This is a header that can be used to connect to the printer, scanner or other devices.

Pin	Signal Name	Pin	Signal Name
1	STROBE	14	AFD
2	PD0	15	ERROR
3	PD1	16	INIT
4	PD2	17	SLCTIN
5	PD3	18	Ground
6	PD4	19	Ground
7	PD5	20	Ground
8	PD6	21	Ground
9	PD7	22	Ground
10	ACK	23	Ground
11	BUSK	24	Ground
12	PE	25	Ground
13	SLCT	26	Key

Installing a SATA Hard Drive

This section describes how to install a SATA Hard Drive.

About SATA Connectors

Your motherboard features four SATA connectors supporting a total of four drives. SATA refers to Serial ATA (Advanced Technology Attachment) is the standard interface for the IDE hard drives which are currently used in most PCs. These connectors are well designed and will only fit in one orientation. Locate the SATA connectors on the motherboard and follow the illustration below to install the SATA hard drives.

Installing Serial ATA Hard Drives

To install the Serial ATA (SATA) hard drives, use the SATA cable that supports the Serial ATA protocol. This SATA cable comes with a SATA power cable. You can connect either end of the SATA cable to the SATA hard drive or the connector on the motherboard.




SATA cable (optional)



SATA power cable (optional)

Refer to the illustration below for proper installation:

- 1 Attach either cable end to the connector on the motherboard.
- 2 Attach the other cable end to the SATA hard drive.
- 3 Attach the SATA power cable to the SATA hard drive and connect the other end to the power supply.




** For reference only*



This motherboard supports the “Hot-Plug” function.

Connecting I/O Devices

The backplane of the motherboard has the following I/O ports:

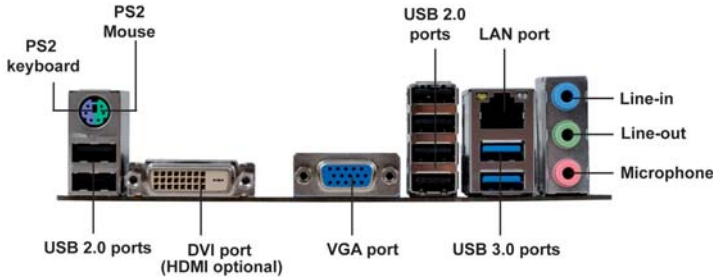


- PS/2 Keyboard/ Mouse Combo Port** Connect the PS/2 Keyboard or PS/2 Mouse to the PS/2 combo port.
- DVI Port (optional)** Connect the DVI port to the monitor.
- VGA Port** Connect your monitor to the VGA port.
- LAN Port** Connect an RJ-45 jack to the LAN port to connect your computer to the Network.
- USB 2.0 Ports** Use the USB 2.0 ports to connect USB 2.0 devices.
- USB 3.0 Ports** Use the USB 3.0 ports to connect USB 3.0 devices.
- Audio Ports** Use the three audio ports to connect audio devices. The first jack is for stereo line-in signal. The second jack is for stereo line-out signal. The third jack is for microphone.

Connecting Case Components


After you have installed the motherboard into a case, you can begin connecting the motherboard components. Refer to the following:

- 1 Connect the CPU cooling fan cable to **CPU_FAN**.
- 2 Connect the standard power supply connector to **ATX_POWER**.
- 3 Connect the case switches and indicator LEDs to the **F_PANEL**.
- 4 Connect the system cooling fan connector to **SYS_FAN**.
- 5 Connect the power cooling fan connector to **PWR_FAN**.
- 6 Connect the auxiliary case power supply connector to **ATX12V**.
- 7 Connect the case speaker cable to **SPK**.

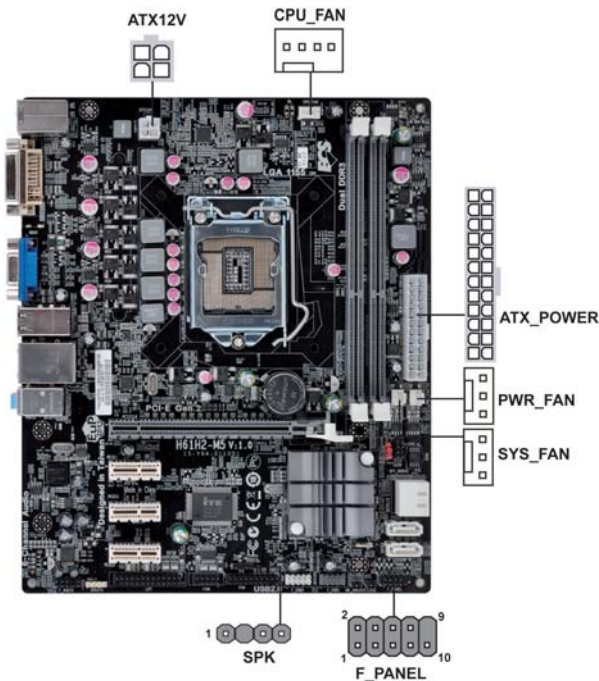

Connecting 24-pin power cable

The ATX 24-pin connector allows you to connect to ATX v2.x power supply.




24-pin power cable

With ATX v2.x power supply, users please note that when installing 24-pin power cable, the latches of power cable and the ATX1 match perfectly.



Connecting 4-pin power cable

The ATX12V4P power connector is used to provide power to the CPU.



4-pin power cable

When installing 4-pin power cable, the latches of power cable and the ATX12V4P match perfectly.

CPU_FAN: CPU cooling FAN Power Connector

Pin	Signal Name	Function
1	GND	System Ground
2	+12V	Power +12V
3	Sense	Sensor
4	PWM	PWM



Users please note that the fan connector supports the CPU cooling fan of 1.1A ~ 2.2A (26.4W max) at +12V.

SYS_FAN: System Cooling FAN Power Connector

Pin	Signal Name	Function
1	GND	System Ground
2	+12V	Power +12V
3	Sense	Sensor

ATX_POWER: ATX 24-pin Power Connector

Pin	Signal Name	Pin	Signal Name
1	+3.3V	13	+3.3V
2	+3.3V	14	-12V
3	Ground	15	Ground
4	+5V	16	PS_ON
5	Ground	17	Ground
6	+5V	18	Ground
7	Ground	19	Ground
8	PWRGD	20	-5V
9	+5VSB	21	+5V
10	+12V	22	+5V
11	+12V	23	+5V
12	+3.3V	24	Ground

PWR_FAN: Power Cooling FAN Power Connector

Pin	Signal Name	Function
1	GND	System Ground
2	+12V	Power +12V
3	Sense	Sensor

ATX12V: ATX 12V Power Connector


Pin	Signal Name
1	Ground
2	Ground
3	+12V
4	+12V

SPK: Internal speaker

Pin	Signal Name
1	VCC
2	Key
3	GND
4	Signal

Front Panel Header

The front panel header (F_PANEL) provides a standard set of switch and LED headers commonly found on ATX or Micro ATX cases. Refer to the table below for information:



Pin	Signal	Function	Pin	Signal	Function
1	HD_LED_P	Hard disk LED(+)	2	FP PWR/SLP	*MSG LED(+)
3	HD_LED_N	Hard disk LED(-)	4	FP PWR/SLP	*MSG LED(-)
5	RST_SW_N	Reset Switch(-)	6	PWR_SW_P	Power Switch(+)
7	RST_SW_P	Reset Switch(+)	8	PWR_SW_N	Power Switch(-)
9	RSVD	Reserved	10	Key	No pin

* MSG LED (dual color or single color)

Hard Drive Activity LED

Connecting pins 1 and 3 to a front panel mounted LED provides visual indication that data is being read from or written to the hard drive. For the LED to function properly, an IDE drive should be connected to the onboard IDE interface. The LED will also show activity for devices connected to the SCSI (hard drive activity LED) connector.

Power/Sleep/Message waiting LED

Connecting pins 2 and 4 to a single or dual-color, front panel mounted LED provides power on/off, sleep, and message waiting indication.

Reset Switch

Supporting the reset function requires connecting pin 5 and 7 to a momentary-contact switch that is normally open. When the switch is closed, the board resets and runs POST.

Power Switch

Supporting the power on/off function requires connecting pins 6 and 8 to a momentary-contact switch that is normally open. The switch should maintain contact for at least 50 ms to signal the power supply to switch on or off. The time requirement is due to internal de-bounce circuitry. After receiving a power on/off signal, at least two seconds elapses before the power supply recognizes another on/off signal.

This concludes Chapter 2. The next chapter covers the BIOS.

Memo

Chapter 3

Using BIOS

About the Setup Utility

The computer uses the latest “American Megatrends Inc.” BIOS with support for Windows Plug and Play. The CMOS chip on the motherboard contains the ROM setup instructions for configuring the motherboard BIOS.

The BIOS (Basic Input and Output System) Setup Utility displays the system’s configuration status and provides you with options to set system parameters. The parameters are stored in battery-backed-up CMOS RAM that saves this information when the power is turned off. When the system is turned back on, the system is configured with the values you stored in CMOS.

The BIOS Setup Utility enables you to configure:

- Hard drives, diskette drives and peripherals
- Video display type and display options
- Password protection from unauthorized use
- Power Management features

The settings made in the Setup Utility affect how the computer performs. Before using the Setup Utility, ensure that you understand the Setup Utility options.

This chapter provides explanations for Setup Utility options.

The Standard Configuration

A standard configuration has already been set in the Setup Utility. However, we recommend that you read this chapter in case you need to make any changes in the future.

This Setup Utility should be used:


- when changing the system configuration
- when a configuration error is detected and you are prompted to make changes to the Setup Utility
- when trying to resolve IRQ conflicts
- when making changes to the Power Management configuration
- when changing the password or making other changes to the Security Setup

Entering the Setup Utility

When you power on the system, BIOS enters the Power-On Self Test (POST) routines. POST is a series of built-in diagnostics performed by the BIOS. After the POST routines are completed, the following message appears:

Press DEL to enter SETUP

Press the delete key to access BIOS Setup Utility.

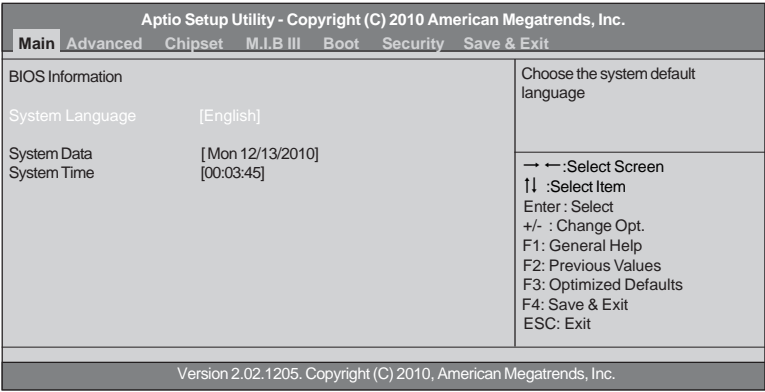

Resetting the Default CMOS Values

When powering on for the first time, the POST screen may show a “CMOS Settings Wrong” message. This standard message will appear following a clear CMOS data at factory by the manufacturer. You simply need to Load Default Settings to reset the default CMOS values.

Note: Changes to system hardware such as different CPU, memories, etc. may also trigger this message.



Using BIOS

When you start the Setup Utility, the main menu appears. The main menu of the Setup Utility displays a list of the options that are available. A highlight indicates which option is currently selected. Use the cursor arrow keys to move the highlight to other options. When an option is highlighted, execute the option by pressing <Enter>.

Some options lead to pop-up dialog boxes that prompt you to verify that you wish to execute that option. Other options lead to dialog boxes that prompt you for information.

Some options (marked with a triangle ►) lead to submenus that enable you to change the values for the option. Use the cursor arrow keys to scroll through the items in the submenu.

Using BIOS

In this manual, default values are enclosed in parenthesis. Submenu items are denoted by a triangle ▶.



The default BIOS setting for this motherboard apply for most conditions with optimum performance. We do not suggest users change the default values in the BIOS setup and take no responsibility to any damage caused by changing the BIOS settings.

BIOS Navigation Keys

The BIOS navigation keys are listed below:

KEY	FUNCTION
ESC	Exits the current menu
↑↓→←	Scrolls through the items on a menu
+/-	Modifies the selected field's values
Enter	Select
F1	General Help
F2	Previous Value
F3	Optimized Defaults
F4	Save & Exit



For the purpose of better product maintenance, the manufacture reserves the right to change the BIOS items presented in this manual. The BIOS setup screens shown in this chapter are for reference only and may differ from the actual BIOS. Please visit the manufacture's website for updated manual.

Main Menu

When you enter the BIOS Setup program, the main menu appears, giving you an overview of the basic system information. Select an item and press <Enter> to display the submenu.

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.

MainAdvancedChipsetM.I.B IIIBootSecuritySave & Exit

BIOS Information

System Language [English]

System Data [Thu 10/14/2010]

System Time [20:28:07]

Choose the system default language

→ ←:Select Screen
↑↓ :Select Item
Enter : Select
+/- : Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

System Language

English
Español
Deutsch
Русский
简体中文
한국어
日本語
Italiano
Português
繁體中文

Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.



Multi-Language BIOS

Multi-language BIOS allows you to see and set up the BIOS with your native language. It helps Non-English users to solve the problem of setting up the BIOS and achieve extra system performance easily.

Date & Time

The Date and Time items show the current date and time on the computer. If you are running a Windows OS, these items are automatically updated whenever you make changes to the Windows Date and Time Properties utility.

Advanced Menu

The Advanced menu items allow you to change the settings for the CPU and other system.

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main	Advanced Chipset M.I.B III Boot Security Save & Exit
Legacy OpROM Support	
Launch PXE OpROM	[Disabled]
Launch Storage OpROM	[Enabled]
▶ LAN Configuration	
▶ ECS eJIFFY Function	
▶ PC Health Status	
▶ Power Management Setup	
▶ ACPI Settings	
▶ CPU Configuration	
▶ SATA Configuration	
▶ USB Configuration	
▶ Super IO Configuration	
▶ Trusted Computing	
	Enable/Disable Onboard LAN Option ROM
	→ ← :Select Screen
	↑↓ :Select Item
	Enter : Select
	+/- : Change Opt.
	F1: General Help
	F2: Previous Values
	F3: Optimized Defaults
	F4: Save & Exit
	ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.	

Launch PXE OpROM (Disabled)

Use this item to enable or disable the PXE OpROM.

Launch Storage OpROM (Enabled)

Use this item to enable or disable the Storage OpROM.

LAN Configuration

The item in the menu shows the LAN-related information that the BIOS automatically detects.

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main	Advanced Chipset M.I.B III Boot Security Save & Exit
LAN Configuration	Enable/Disable Onboard LAN 1 Controller
Onboard LAN 1 Controller [Enabled]	→ ←: Select Screen ↑ ↓ : Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.	

Onboard LAN 1 Controller (Enabled)

Use this item to enable or disable the Onboard LAN.

Press <Esc> to return to the Advanced Menu page.

ECS eJIFFY Function

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main	Advanced Chipset M.I.B III Boot Security Save & Exit
ECS eJIFFY Function	Make sure that the eJIFFY has been installed to hard disk.
ECS eJIFFY Function [Disabled]	→ ←: Select Screen ↑ ↓ : Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.	

ECS eJIFFY Function (Disabled)

This item enables or disables ECS eJIFFY Function.

Press <Esc> to return to the Advanced Menu page.

PC Health Status

On motherboards support hardware monitoring, this item lets you monitor the paeameters for critical voltages, temperatures and fan speeds.

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset M.I.B III Boot Security Save & Exit
PC Health Status		
▶Smart Fan Function		
CPU Fan Speed	: 2974 RPM	→ ←:Select Screen ↑↓ :Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
System Fan Speed	: 0RPM	
Power Fan Speed	: 0RPM	
CPU Vcore	: 1.248V	
IMC Voltage	: 1.056V	
VDIMM	: 1.536V	
--: PECI Mode --:		
Offset to TCC Activation Temp : -52		
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.		

▶ Smart Fan Function

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset M.I.B III Boot Security Save & Exit
SMART Fan Mode		[Normal]
SMART Fan start PWM value		180
SMART Fan start PWM TEMP(-)		30
Delta T		+3
SMART Fan Slope PWM value		10 PWM value/unite
CPU Fan Full Speed Offset (-)		23
System SMART Fan Control		[Enabled]
SMART Fan Mode		[Normal]
SMART Fan start PWM value		180
SMART Fan start PWM TEMP(-)		30
Delta T		+3
SMART Fan Slope PWM value		10 PWM value/unite
System Fan Full Speed Offset (-)		23
Power SMART Fan Control		[Enabled]
SMART Fan Mode		[Normal]
SMART Fan start PWM value		180
SMART Fan start PWM TEMP(-)		30
Delta T		+3
SMART Fan Slope PWM value		10 PWM value/unite
Power Fan Full Speed Offset (-)		23

CPU/System/Power SMART FAN Control (Enabled)

This item allows you to enable/disable the control of the CPU/System/Power fan speed by changing the fan voltage.

SMART Fan Mode (Normal)

This item allows you to select the fan mode (Normal, Quiet, Silent, or Manual) for a better operation environment. If you choose Normal mode, the fan speed will be auto adjusted depending on the CPU temperature. If you choose Quiet mode, the fan speed will be auto minimized for quiet environment. If you choose Silent mode, the fan speed will be auto restricted to make system more quietly. If you choose Manual mode, the fan speed will be adjust depending on users' parameters.

SMART Fan start PWM value (180)

This item is used to set the start PWM value of the smart fan.

SMART Fan start TEMP(-) (30)

This item is used to set the start temperature of the smart fan.

DeltaT (+3)

This item specifies the range that controls CPU temperature and keeps it from going so high or so low when smart fan works.

SMART Fan Slope PWM value (10 PWM value/unit)

This item is used to set the Slope Select PWM of the smart fan.

CPU/System/Power Fan Full Speed Offset(-) (23)

This item is used to set the CPU/System/Power fan full speed offset value.

Press <Esc> to return to the PC Health Status page.

System Component Characteristics


These items display the monitoring of the overall inboard hardware health events, such as System & CPU temperature, CPU & DIMM voltage, CPU & system fan speed,... etc.

- CPU Fan Speed
- System Fan Speed
- Power Fan Speed
- CPU Vcore
- VDIMM
- IMC Voltage

Press <Esc> to return to the Advanced Menu page.

Power Management Setup

This page sets up some parameters for system power management operation.

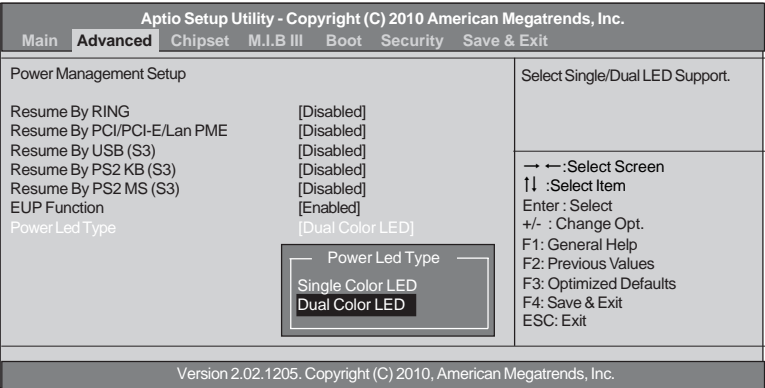

Resume By RING (Disabled)

The system can be turned off with a software command. If you enable this item, the system can automatically resume if there is an incoming call on the Modem. You must use an ATX power supply in order to use this feature.

Resume By PCI/PCI-E/Lan PME (Disabled)

The system can be turned off with a software command. If you enable this item, the system can automatically resume if there is an incoming call on the PCI Modem or PCI LAN card. You must use an ATX power supply in order to use this feature. Use this item to do wake-up action if inserting the PCI card.

Resume By USB (S3) (Disabled)

This item allows you to enable/disable the USB device wakeup function from S3 mode.

Resume By PS2 KB (S3) (Disabled)

This item enables or disables you to allow keyboard activity to awaken the system from power saving mode.

Resume By PS2 MS (S3) (Disabled)

This item enables or disables you to allow mouse activity to awaken the system from power saving mode.

EUP Support (Enabled)

This item allows user to enable or disable EUP support.


Power Led Type (Dual Color Type)

This item allows user to set the power led color type.

Press <Esc> to return to the Advanced Menu page.

ACPI Configuration

The item in the menu shows the highest ACPI sleep state when the system enters suspend.

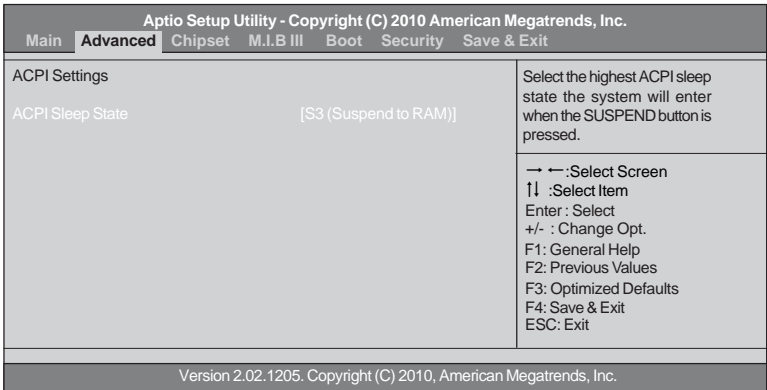


ACPI Sleep State (S3(Suspend to RAM))

This item allows user to enter the APCI S3 (Suspend toRAM) Sleep State(default).

Press <Esc> to return to the Advanced Menu page.

CPU Configuration

Scroll to this item and press <Enter> to view the following screen:

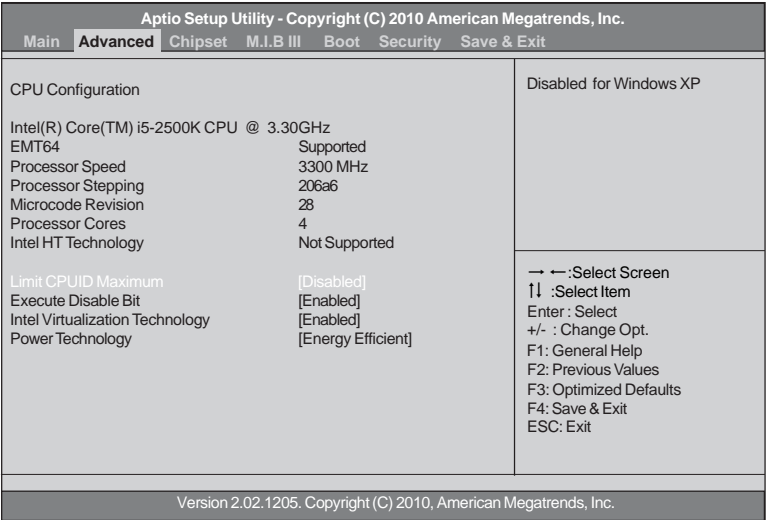

Inter(R) Core(TM) i5-2500k CPU @ 3.30 GHz

This is display-only field and displays the information of the CPU installed in your computer.

EMT64 (Supported)

This item shows the computer supports EMT64.

Processor Speed (3300MHz)

This item shows the current processor speed.

Processor Stepping (206a6)

This item shows the processor stepping version.

Microcode Revision (28)

This item shows the Microcode version.

Processor Cores (4)

This item shows the core number of the processor.

Intel HT Technology (Not Supported)

This item shows that your computer supports Intel HT technology or not.

Limit CPUID Maximum (Disabled)

Use this item to enable or disable the maximum CPUID value limit. When supports Prescott and LGA775 CPUs, enables this to prevent the system from “rebooting” when trying to install Windows NT 4.0.

Excute Disable Bit (Enabled)

This item allows the processor to classify areas in memory by where application code can execute and where it cannot. When a malicious worm attempts to insert code in the buffer, the processor disables code execution, preventing damage or worm propagation. Replacing older computers with Execute Disable Bit enabled systems can halt worm attacks, reducing the need for virus related repair.

Intel Virtualization Technology (Enabled)

When disabled, a VMM cannot utilize the additional hardware capabilities provided by Vndor Pool Technology.

Power Technology (Energy Efficient)

Use this item to control the Energy mode of the processor.

Press <Esc> to return to the Advanced Menu page.

SATA Configuration

Use this item to show the mode of serial SATA configuration options.

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset M.I.B III Boot Security Save & Exit
SATA Configuration		(1) IDE Mode. (2) AHCI Mode.
SATA Mode	[IDE Mode]	
Serial-ATA Controller 0	[Compatible]	
Serial-ATA Controller 1	[Enhanced]	
SATA Port1	Not Present	
SATA Port2	Not Present	
SATA Port3	Not Present	→ ←:Select Screen ↑↓ :Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
SATA Port4	Not Present	
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.		

SATA Mode (IDE Mode)

Use this item to select SATA mode.

Serial-ATA Controller 0/1 (Compatible/Enhanced)

Use this item to select the Serial-ATA cotroller options: Disabled, Compatible, Enhanced.

SATA Port 1~4 (Not Present)

This motherboard supports four SATA channel and each channel allows one SATA device to be installed. Use these items to configure each device on the SATA channel.

Press <Esc> to return to the Advanced Menu page.

USB Configuration

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset M.I.B III Boot Security Save & Exit
USB Configuration		Enabled/Disabled All USB Devices
All USB Devices	[Enabled]	
USB 3.0 Controller	[Enabled]	
Legacy USB Support	[Enabled]	→ ←:Select Screen ↑↓ :Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.		

All USB Devices (Enabled)

Use this item to enable or disable all USB devices.

USB 3.0 Devices (Enabled)

Use this item to enable or disable USB 3.0 devices.

Legacy USB Support (Enabled)

Use this item to enable or disable support for legacy USB devices. Setting toAudio allows the system to detect the presence of the USB device at startup. If detected, the USB controller legacy mode is enabled. If no USB device is detected, the legacy USB support is disabled.

Press <Esc> to return to the Advanced Menu page.

Super IO Configuration

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main	Advanced
Super IO Configuration Super IO Chip IT8728 ▶ Serial Port 0 Configuration ▶ Parallel Port Configuration	Set Parameters of Serial Port 0 (COMA) → ←: Select Screen ↑↓ : Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2012, American Megatrends, Inc.	

Super IO Chip (IT8728)

This item shows the information of the Super IO chip.

▶ Serial Port 0 Configuration

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main	Advanced
Serial Port 0 Configuration Serial Port [Enabled] Device Settings IO=3F8h; IRQ=4; Change Settings [Auto]	Enable or Disable Serial Port (COM) → ←: Select Screen ↑↓ : Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.	

Serial Port (Enabled)

This item allows you to enable or disable serial port.

Device Settings (IO=3F 8h; IRQ=4)

This item shows the information of the device settings.

Change Settings (Auto)

Use this item to change device settings.

Press <Esc> to return to the Advanced Menu page.

► **Parallel Port Configuration**

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset M.I.B III Boot Security Save & Exit
Parallel Port Configuration		Enable or Disable Parallel Port (LPT/LPTE)
Parallel Port	[Enabled]	
Device Settings	IO=378h; IRQ=5;	
Change Settings	[Auto]	→ ← :Select Screen
Device Mode	[Standard Parallel ...]	↑ ↓ :Select Item
		Enter : Select
		+/- : Change Opt.
		F1: General Help
		F2: Previous Values
		F3: Optimized Defaults
		F4: Save & Exit
		ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.		

Parallel Port (Enabled)

This item allows you to enable or disable parallel port.

Device Settings (IO=3F 8h; IRQ=4)

This item shows the information of the device settings.

Change Settings (Auto)

Use this item to change device settings.

Device Mode (Standard Parallel ...)

Use this item to select device mode.

Press <Esc> to return to the Advanced Menu page.

Trusted Computing

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset M.I.B III Boot Security Save & Exit
TPM Configuration		Enables or Disables TPM support. O.S. will not show TPM. Reset of platform is required.
TPM Support [Enabled]		
Current TPM Status Information		→ ←: Select Screen ↑↓ : Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
NO TPM Hardware		
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.		

TPM SUPPORT (Enabled)

This item enables or disables TPM support.

Current TPM Status Information


This item shows the information of current TPM status.

No TPM Hardware

This item shows the TPM Status.


Chipset Menu

The chipset menu items allow you to change the settings for the North chipset, South chipset and other system.

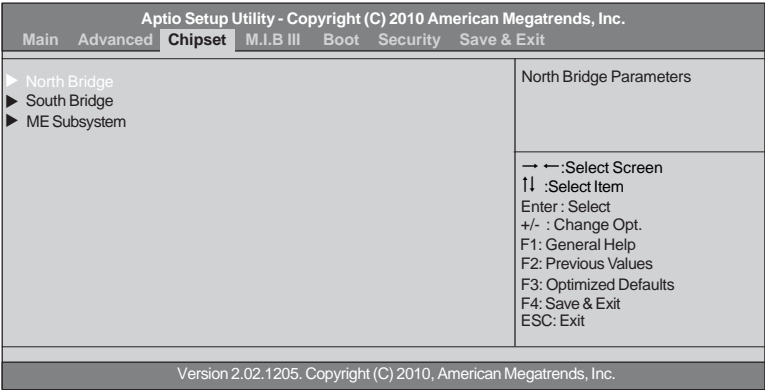

► North Bridge

Scroll to this item and press <Enter> and view the following screen:

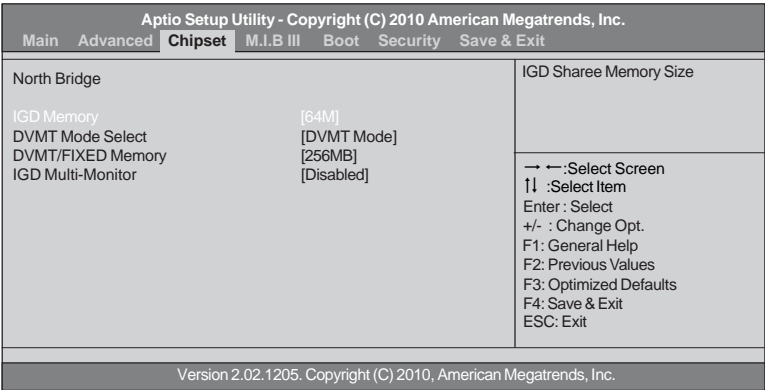

IGD Memory (64M)

This item shows the information of the IGD(Internal Graphics device) memory.

DVMT Mode Select (DVMT Mode)

This item allows you to select the DVMT operating mode.

DVMT/FIXED Memory (256MB)

When set to Fixed Mode, the graphics driver will reserve a fixed position of the system memory as graphics memory, according to system and graphics requirements.

IGD Multi-Monitor (Disabled)


This item enables or disables IGD(Internal Graphics device) multi-monitor.

Press <Esc> to return to the chipset menu page.

Multi-Monitor technology

Multi-Monitor technology can help you to increase the area available for programs running on a single computer system through using multiple display devices.

It is not only to increase larger screen viewing but also to improving personal productivity.

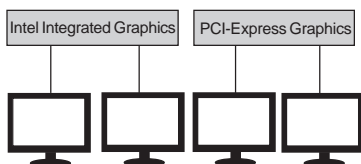


Please note that Multi-Monitor technology supports up to four monitors: one or two Intel integrated Graphics and one or two PCI-Express graphics devices under Windows 7.

Step 1. Insert ECS drives DVD to run Auto setup or browse the DVD to install Intel chipset drivers, VGA and sound drivers.(If you want know the detail information, please refer to chapter 4.)




Using BIOS

Step 2. Install all the drivers of PCI-Express graphic cards. Click the Browse CD item, then appears the following screen. Select the driver you want to install(e.g NVIDIA GeForce 8400 GS(Microsoft Corporation-WDDM v1.1)) and double click it.

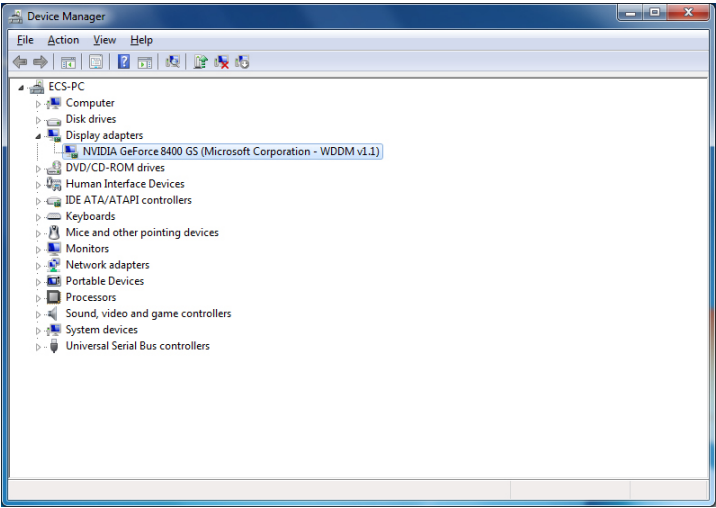


Step 3. Enable IGD Multi-Monitor from BIOS. In the following BIOS screen, please set IGD Multi-Monitor to [Enabled].

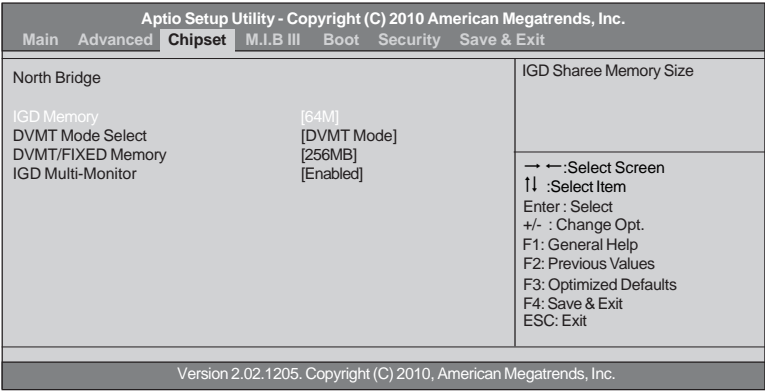




Step 4. Change the appearance of your displays under Windows 7.

1. Enter the Control Panel menu, select the Display in the All Control Panel Items and click the Screen Resolution, then appears the following screen.

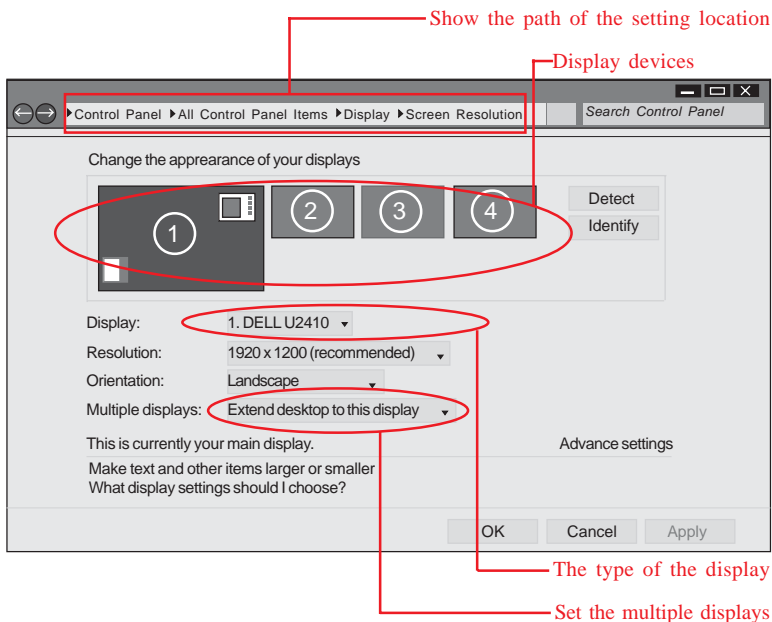

2. Select display devices, set the multiple displays option and to extend desktop for display "Multi-Monitor technology".

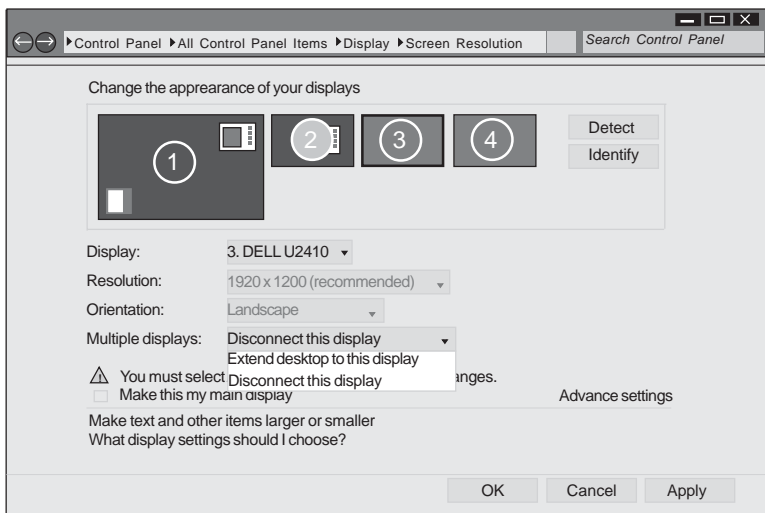

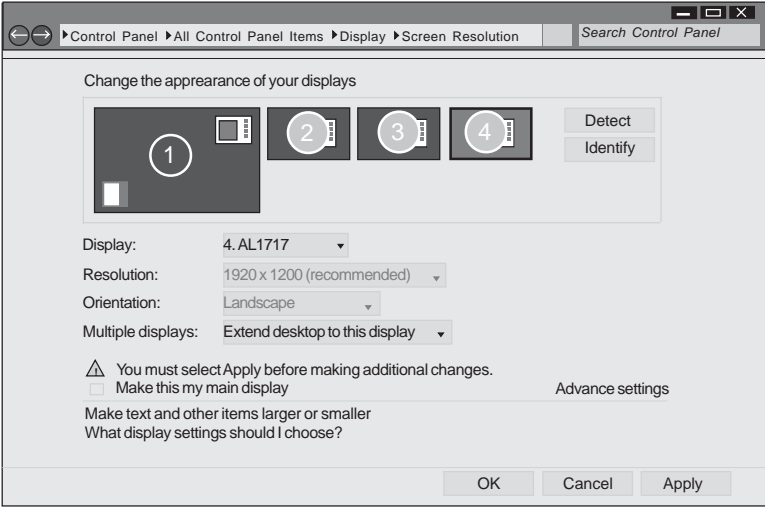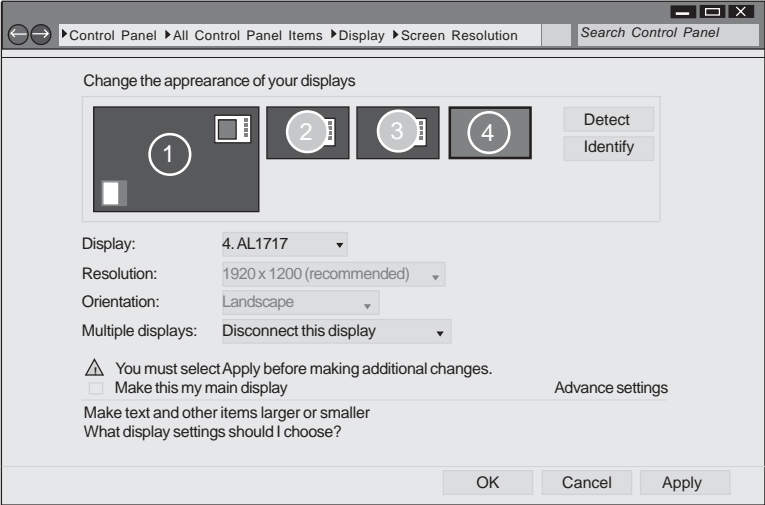

► **South Bridge**

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset
M.I.B III	Boot	Security
Save & Exit		
South Bridge		Specify what state to go to when power is re-applied after a power failure (G3 state).
Restore AC Power Loss	[Power Off]	
Audio Configuration		→ ←: Select Screen
Azalia HD Audio	[Enabled]	↑↓ : Select Item
Azalia Internal HDMI codec	[Enabled]	Enter : Select
Case Open Warning	[Disabled]	+/- : Change Opt.
Chassis Opened	[No]	F1: General Help
		F2: Previous Values
		F3: Optimized Defaults
		F4: Save & Exit
		ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.		

Restore AC Power Loss (Power Off)

This item enables your computer to automatically restart or return to its operating status.

Audio Configuration

This item shows the information of the audio configuration.

Azalia HD Audio (Enabled)

This item enables or disables Azalia HD audio.

Azalia Internal HDMI codec (Enabled)

This item enables or disables Azaia Internal HDMI codec.

Case Open Warning (Disabled)

This item enables or disables the warning if the case is opened up, and the item below indicates the current status of the case.

Chassis Opened (No)

This item indicates whether the case has been opened.

Press <Esc> to return to the chipset menu page.

► **ME Subsystem**

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main	Advanced Chipset M.I.B III Boot Security Save & Exit
Intel ME Subsystem Configuration	ME Subsystem Help
ME Version	7.0.0.1141
ME Subsystem	[Enabled]
	→ ←:Select Screen ↑↓ :Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.	

ME Version (7.0.0.1141)


This item shows the ME version.

ME Subsystem (Enabled)

This item allows you to enable or disable ME subsystem.


M.I.B III (MB Intelligent BIOS III) Menu

This page enables you to set the clock speed and system bus for your system. The clock speed and system bus are determined by the kind of processor you have installed in your system.

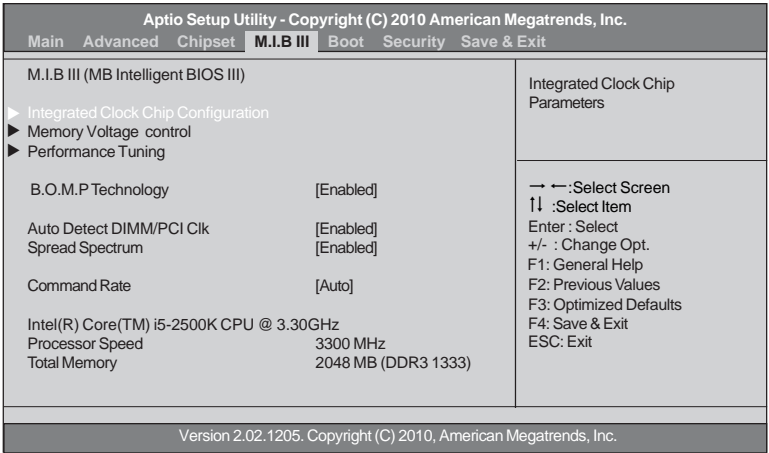

▶ Integrated Clock Chip Configuration

Scroll to this item and press <Enter> to view the following screen:

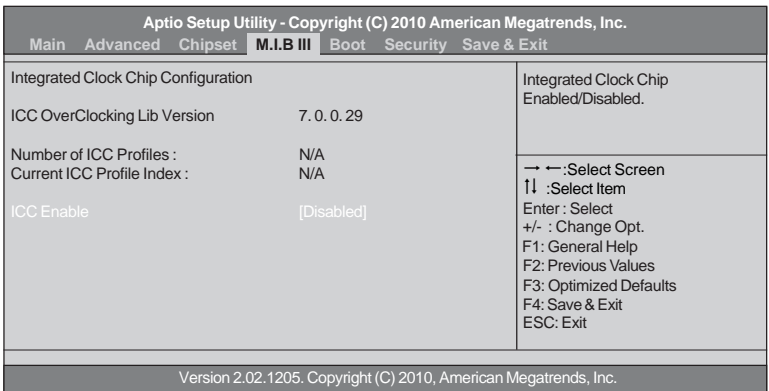

ICC Over-Clocking Lib Version (7.0.0.29)

This item shows the ICC over-clocking lib version.

Number of ICC Profiles (N/A)

This item shows number of ICC profiles.

Current ICC Profiles Index (N/A)

This item shows current ICC profiles index.


ICC Enable (Disabled)

This item allows you to enable or disable current ICC.

Press <Esc> to return to the M.I.B III menu page.

► Memory Voltage Control

Scroll to this item and press <Enter> to view the following screen:

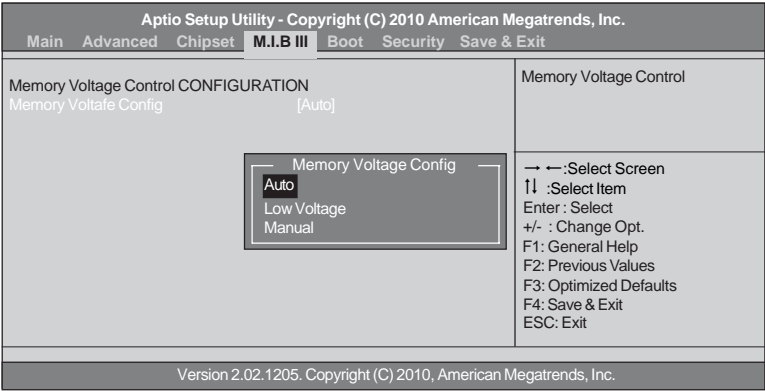


Memory Voltage Config (Auto)

This item allows users to select Memory Voltage Config.

Press <Esc> to return to the M.I.B III menu page.

► Performance Tuning

Scroll to this item and press <Enter> to view the following screen:

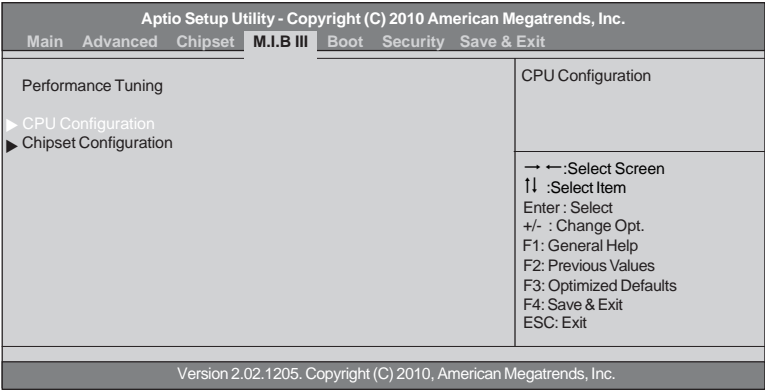

► CPU Configuration

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.		
Main	Advanced	Chipset
	M.I.B III	Boot Security Save & Exit
CPU Ratio	33	IO Core Current
IA Core Current	[Normal]	
Power Limit 1 Value (Watt)	95	
Power Limit 2 Switch	[Enabled]	
Power Limit 2 Value	118	
Long duration maintained	1	
Enhanced Intel SpeedStep Technology	[Enabled]	
Turbo Mode	[Enabled]	
1 Core Ratio Limit	37	
2 Core Ratio Limit	36	
3 Core Ratio Limit	35	
4 Core Ratio Limit	34	
		→ ←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.		

CPU Ratio (33)

This item allows users to control non turbo CPU ratio.

IA Core Current (Normal)

Use this item to control CPU Current Limit. This is for Turbo mode.

Power Limit 1 Value(Watt) (95)

Use this item to control the limit of the TDP. This is for Turbo mode.

Power Limit 2 Switch (Enabled)

Use this item to control the Power Limit 2. This is for Turbo mode.

Power Limit 2 Value (118)

Use this item to control Power Limit 2. PL2 provides an upper limit of the TDP excursions. This is for Turbo mode.

Long duration maintained (1)

Use this item to control the time window over PL1 value should be maintained. This is for Turbo mode.

Enhanced Intel SpeedStep Technology (Enabled)

This item allows users to enable or disable the EIST(Enhanced Intel SpeedStep Technology).

Turbo Mode (Enabled)

This item allows you to control the Intel Turbo Boost Technology.

1/2/3/4-Core Ratio (37/36/35/34)

This item shows the Core Ratio limit value.

Press <Esc> to return to the Performance Tunning page.

► **Chipset Configuration**

Scroll to this item and press <Enter> to view the following screen:

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.						
Main	Advanced	Chipset	M.I.B III	Boot	Security	Save & Exit
Memory Multiplier Configuration						Disabled/Enabled GE OverClocking
Memory Multiplier		[13.33]				
Memory Timing Configuration						
CAS# Latency (tcl)		9				
Row Precharge Time (tRP)		9				
RAS# to CAS# Delay (tRCD)		9				
RAS# Active Time (tRAS)		24				
Intel Graphics Configuration						
GT OverColocking		[Disabled]				
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.						

Memory Multiplier

This item shows the value of Memory Multiplier.

Memory Timing Configuration

This item shows the information of Memory Timing Configuration.

CAS#Latency(tcl) (9)

This item determines the operation of DDR SDRAM memory CAS(column address strobe). It is recommended that you leave this item at the default value. The 2T setting requires faster memory that specifically supports this mode.

Row Precharge Time(tRP) (9)

This item specifies Row precharge to Active or Auto-Refresh of the same bank.

RAS# to CAS# Delay(tRD) (9)

This item specifies the RAS# to CAS# delay to Rd/Wr command to the same bank.

RAS# Active Time(tRAS) (24)

This item specifies the RAS# active time.

Intel Graphics Configuration

This item shows the information of Intel Graphics Configuration.

GT OverClocking [Disabled]

This item allows you to control the internal GFX Turbo mode.

Press <Esc> to return to the Performance Tunning page.

Press <Esc> to return to the M.I.B III menu page.

B.O.M.P Technology (Enabled)

This item allows users to enable or disable B.O.M.P technology. This function can run safe setting to setup menu when system boot fail 3 times.

Auto Detect DIMM/PCI Clk (Enabled)

When this item is enabled, BIOS will disable the clock signal of free DIMM/PCI slots.

Spread Spectrum (Enabled)

If you enable spread spectrum, it can significantly reduce the EMI (Electro-Magnetic Interference) generated by the system.

Command Rate (Auto)

This item allows users to set command rate.

Intel(R) Core(TM) i5-2500K CPU @ 3.30 GHz

This is display-only field and displays the information of the CPU installed in your computer.

Processor Speed (3300MHz)

This item shows the CPU speed.

Total Memory (2048MB(DDR3 1333))

This item shows the total memory of DDR3.

Boot Menu

This page enables you to set the keyboard NumLock state.

Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main	Advanced Chipset M.I.B III Boot Security Save & Exit
Boot Configuration	Select the keyboard NumLock state
Bootup NumLock State [On]	
Boot Option Priorities	→ ←:Select Screen ↑ ↓ :Select Item Enter : Select +/- : Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.	

Boot Configuration

This item shows the information of the boot configuration.

Bootup NumLock State (On)

This item determines if the NumLock key is active or inactive at system start-up time.

Boot Option Priorities

This item enables you to select boot priorities for all boot devices.

Security Menu

This page enables you to set setup administrator and password.



Aptio Setup Utility - Copyright (C) 2010 American Megatrends, Inc.	
Main Advanced Chipset M.I.B III Boot Security Save & Exit	
<p>If ONLY the Administrator's password is set, then this only limits access to Setup and is only asked for when entering Setup.</p> <p>If ONLY the User's password is set, then this is a power on password and must be entered to boot or enter Setup. In Setup the User will have Administrator rights.</p> <p>The password must be 3 to 20 characters long.</p> <p>Administrator Password</p>	<p>Set Setup Administrator Password</p> <hr/> <p>→ ←: Select Screen ↑ ↓: Select Item Enter : Select +/- : Value F1: General Help F2: Previous Value F3: Optimized Defaults F4: Save & Exit ESC: Exit</p>
Version 2.02.1205. Copyright (C) 2010, American Megatrends, Inc.	


Administrator Password

This item allows you to set or change administrator password.

Save & Exit Menu

This page enables you to exit system setup after saving or without saving the changes.

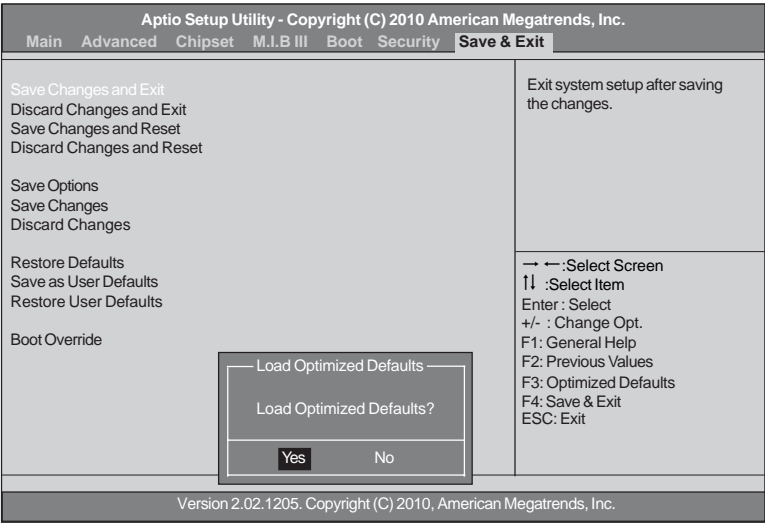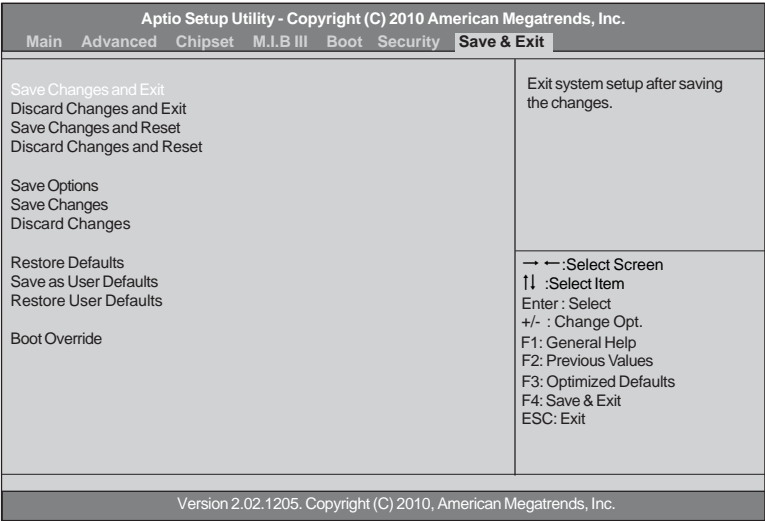

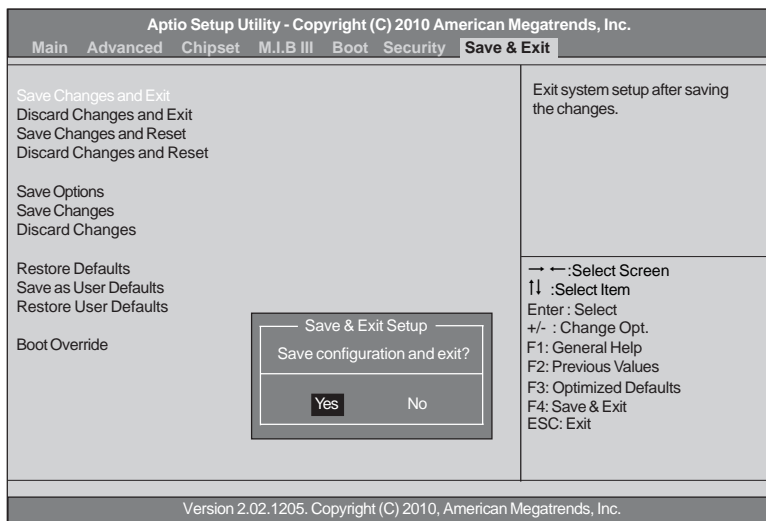

Save Changes and Exit

This item enables you to save the changes that you have made and exit.

Discard Changes and Exit

This item enables you to discard any changes that you have made and exit.

Save Changes and Reset

This item enables you to save the changes that you have made and reset.

Discard Changes and Reset

This item enables you to discard any changes that you have made and reset.

Save Options

This item enables you to save the options that you have made.

Save Changes

This item enables you to save the changes that you have made.

Discard Changes

This item enables you to discard any changes that you have made.

Restore Defaults

This item enables you to restore the system defaults.

Save as User Defaults

This item enables you to save the changes that you have made as user defaults.

Restore User Defaults

This item enables you to restore user defaults.

Boot Override

Use this item to select the boot device.

Updating the BIOS

You can download and install updated BIOS for this motherboard from the manufacturer's Web site. New BIOS provides support for new peripherals, improvements in performance, or fixes for known bugs. Install new BIOS as follows:

- 1 If your motherboard has a BIOS protection jumper, change the setting to allow BIOS flashing.
- 2 If your motherboard has an item called Firmware Write Protect in Advanced BIOS features, disable it. (Firmware Write Protect prevents BIOS from being overwritten.)
- 3 Prepare a bootable device or create a bootable system disk. (Refer to Windows online help for information on creating a bootable system disk.)
- 4 Download the Flash Utility and new BIOS file from the manufacturer's Web site. Copy these files to the bootable device.
- 5 Turn off your computer and insert the bootable device in your computer. (You might need to run the Setup Utility and change the boot priority items on the Advanced BIOS Features Setup page, to force your computer to boot from the bootable device first.)
- 6 At the C:\ or A:\ prompt, type the Flash Utility program name and the file name of the new BIOS and then press <Enter>. Example: AFUDOS.EXE 040706.ROM
- 7 When the installation is complete, remove the bootable device from the computer and restart your computer. If your motherboard has a Flash BIOS jumper, reset the jumper to protect the newly installed BIOS from being overwritten. The computer will restart automatically.

This concludes Chapter 3. Refer to the next chapter for information on the software supplied with the motherboard.

Chapter 4

Using the Motherboard Software

About the Software DVD-ROM/CD-ROM

The support software DVD-ROM/CD-ROM that is included in the motherboard package contains all the drivers and utility programs needed to properly run the bundled products. Below you can find a brief description of each software program, and the location for your motherboard version. More information on some programs is available in a README file, located in the same directory as the software. Before installing any software, always inspect the folder for files named README.TXT or something similar. These files may contain important information that is not included in this manual.

1. Never try to install all software from folder that is not specified for use with your motherboard.
2. The notice of Intel HD Audio Installation (optional): The Intel High Definition audio functionality unexpectedly quits working in Windows Server 2003 Service Pack 1 or Windows XP Professional x64 Edition. Users need to download and install the update packages from the Microsoft Download Center “**before**” installing HD audio driver bundled in the driver disk. Please log on to <http://support.microsoft.com/default.aspx?scid=kb;en-us;901105#appliesto> for more information.

Auto-installing under Windows XP/Vista/7

The Auto-install DVD-ROM/CD-ROM makes it easy for you to install the drivers and software for your motherboard.



If the Auto-install DVD-ROM/CD-ROM does not work on your system, you can still install drivers through the file manager for your OS (for example, Windows Explorer). Refer to the Utility Folder Installation Notes later in this chapter.

The support software DVD-ROM/CD-ROM disc loads automatically under Windows XP/Vista/7. When you insert the DVD-ROM/CD-ROM disc in the DVD-ROM/CD-ROM drive, the autorun feature will automatically bring up the install screen. The screen has three buttons on it, Setup, Browse CD and Exit.



* For reference only



If the opening screen does not appear; double-click the file “setup.exe” in the root directory.

Using the Motherboard Software

Drivers

Setup	Click the Setup button to run the software installation program. Select from the menu which software you want to install.
Utilities	Click the Utilities button to display the application software and other software utilities that are available on the disk. Select the software you want to install then follow installation procedure.
Browse CD	<p>The Browse CD button is the standard Windows command that allows you to open Windows Explorer and show the contents of the support disk.</p> <p>Before installing the software from Windows Explorer, look for a file named README.TXT or something similar. This file may contain important information to help you install the software correctly.</p> <p>Some software is installed in separate folders for different operating systems.</p> <p>In installing the software, execute a file named SETUP.EXE by double-clicking the file and then following the instructions on the screen.</p>
Exit	The EXIT button closes the Auto Setup window.

Utilities

Lists the software utilities that are available on the disk.


Information

Displays the path for all software and drivers available on the disk.

Running Setup

Follow these instructions to install device drivers and software for the motherboard:

1. Click **Setup**. The installation program begins:

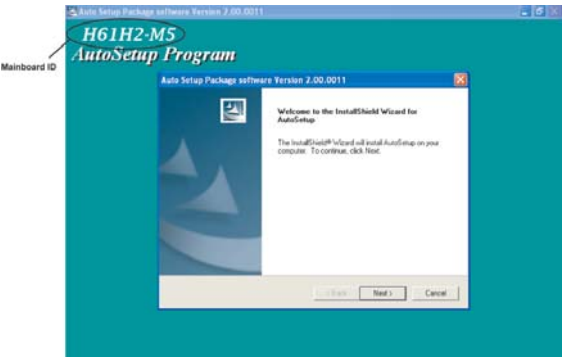


The following screens are examples only. The screens and driver lists will be different according to the motherboard you are installing.


The motherboard identification is located in the upper left-hand corner.

Using the Motherboard Software

2. Click **Next**. The following screen appears:

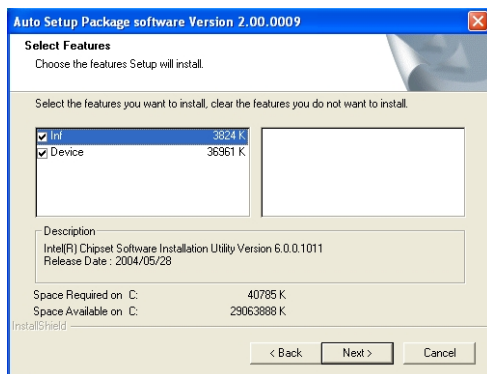

3. Check the box next to the items you want to install. The default options are recommended.
4. Click **Next** run the Installation Wizard. An item installation screen appears:

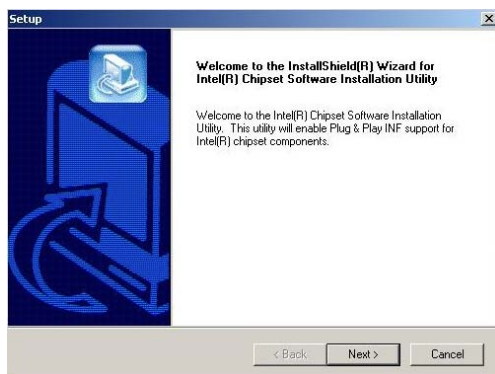


5. Follow the instructions on the screen to install the items.



Drivers and software are automatically installed in sequence. Follow the onscreen instructions, confirm commands and allow the computer to restart a few times to complete the installation.



Windows Vista/7 will appear below UAC (User Account Control) message after the system restart. You must select “Allow” to install the next driver. Continue this process to complete the drivers installation.

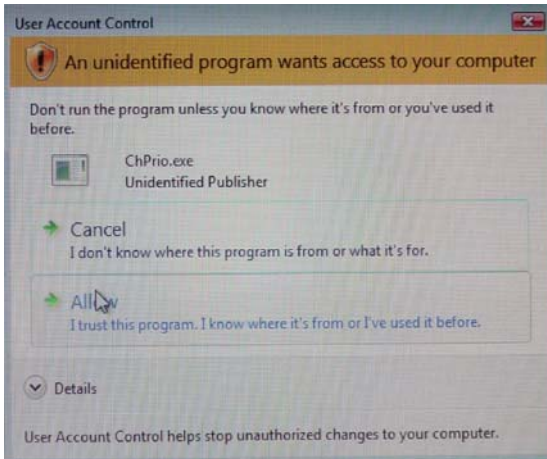

Manual Installation

Insert the disk in the DVD-ROM/CD-ROM drive and locate the PATH.DOC file in the root directory. This file contains the information needed to locate the drivers for your motherboard.

Look for the chipset and motherboard model; then browse to the directory and path to begin installing the drivers. Most drivers have a setup program (SETUP.EXE) that automatically detects your operating system before installation. Other drivers have the setup program located in the operating system subfolder.

If the driver you want to install does not have a setup program, browse to the operating system subfolder and locate the readme text file (README.TXT or README.DOC) for information on installing the driver or software for your operating system.

Utility Software Reference

All the utility software available from this page is Windows compliant. They are provided only for the convenience of the customer. The following software is furnished under license and may only be used or copied in accordance with the terms of the license.



These software(s) are subject to change at anytime without prior notice. Please refer to the support disk for available software.

Chapter 5

Setting Up eJIFFY

Introduction

eJIFFY is a fast boot program under Linux. Instead of waiting Windows O.S to start execution, eJIFFY is ready to provide users the instant enjoyment on web browsing, photo review and online chat just within several seconds after boot up.



Note: eJIFFY is ECS *optional* feature utility corresponding to the DVD activation and BIOS setup. Please check the hard copy user's guide or product color-box to see if the model has embodied eJIFFY feature. (eJIFFY icon on color-box



Version: 6.0

Installation and BIOS Setup

DVD Activation

Finish the DVD utility setup, and then set the BIOS to complete eJIFFY activation.

- 1. Insert ECS software utility DVD and enter below “Utilities” screen. Click eJIFFY feature item to install.




- 2. Follow the onscreen instructions to finish eJIFFY setup.



Setting Up eJIFFY

3. After setting up eJIFFY under Windows, you can switch eJIFFY display/keyboard language from English to your local language. The changes will be applied after rebooting.

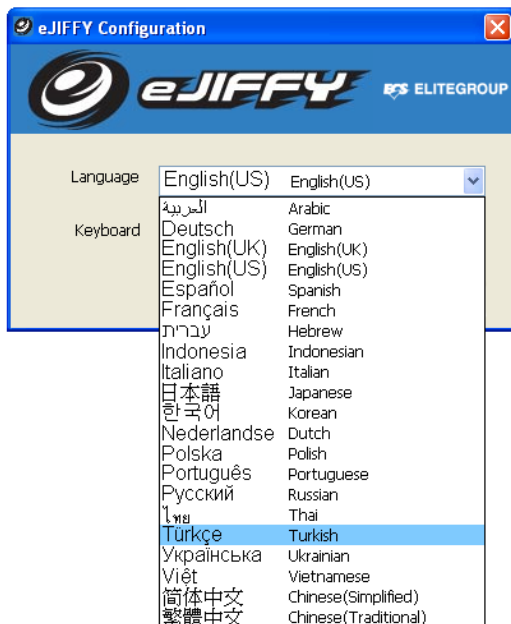


Note: The keyboard language selection list offers several more regional keyboard setups to switch with the default English typing. Please refer to the usage FAQ for more tips.

Setting Up eJIFFY

4. Restart your computer after eJIFFY installation. Press or click the BIOS Setup button on the post screen to enter the BIOS setup page after boot up.



5. And then enter the *Advanced Setup* page to enable the item *ECS eJIFFY Function*. Press F4 to save the configuration and exit. Restart your computer.

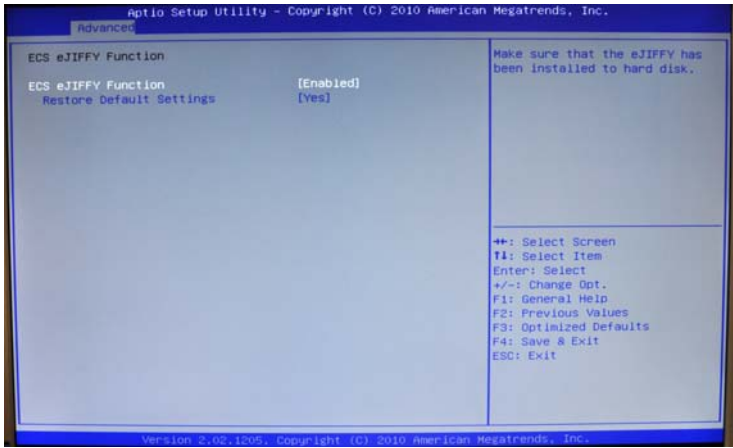


Note: 1. eJIFFY is available in SATA/IDE/AHCI mode. It does not support RAID configuration and the onboard 34-pin floppy drives.
2. Please refer to ECS website for new eJIFFY application updates.

Setting Up eJIFFY

Entering eJIFFY

The post screen appears within several seconds after boot up and it has three buttons

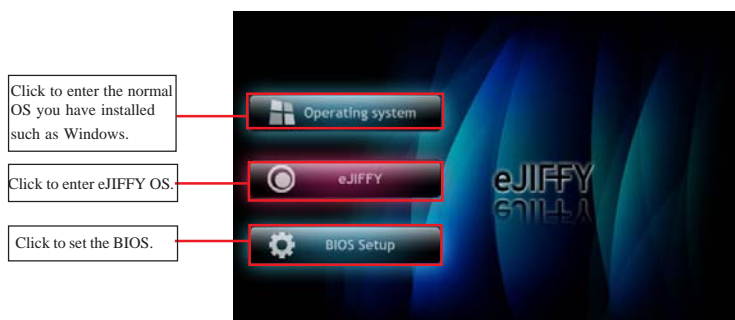

If you click eJIFFY, the following screen will appear. And If you make no choice it will enter the normal OS automatically after ten seconds.



Feature Icons

The following illustration shows the main feature icons that eJIFFY provides on the menu.



eWeb: Firefox for web browsing/webmail and watching flash video.



ePix: Photo viewing.



ePal: On-line chat tool to use the most popular IMs in the world. (MSN, ICQ, AIM, etc.)



Shows ePal on-line connection status.



Shut Down/Restart: Ends your session and turns off the computer./Ends your session and restart the computer..



Shows the network connection status.



Click once to connect the storage disk to your computer. Click for the second time to remove your storage disk safely. (please refer to the FAQ for more usage information.)



Language Control Panel



Switch Keyboard Languages



Allows you to adjust the sound volume level from mute to the max

Setting Up eJIFFY

Usage FAQ




Language Control Panel: Besides setting English as the default interface, eJIFFY offers multi-language displays and keyboard settings for language-switch. Open the language control panel to select a preferable language setting.

Keyboard Language Setup

Step1. Click



to open the language control panel.

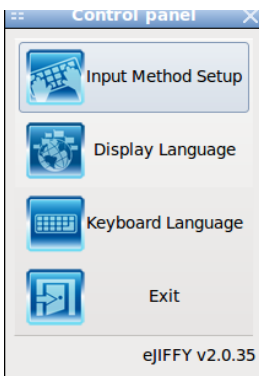

Step 2: Click “Keyboard Language” icon




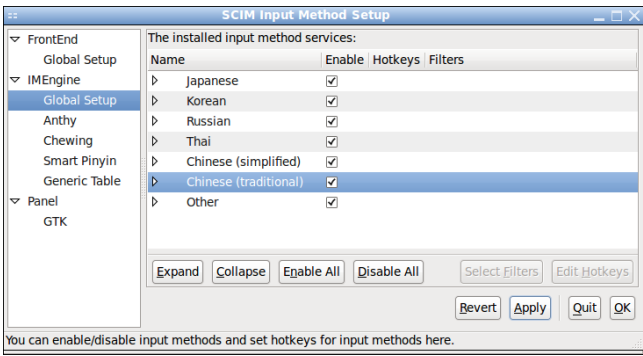
to open the keyboard selection

list, which offers several regional keyboard settings besides default English keyboard.

Step 3: Click the selected keyboard language (e.g. English(US)) and press “OK”.



Click  to enable all possible language inputs you want to apply, and click “Apply”:



Select your desired language

Japanese - Anthy

Korean >

Russian

Thai

Chinese (simplified) >

Chinese (traditional) >


Other

English/Keyboard


How to change display language?

Open the Language Control Panel and click  to show the display language

list. Check your desired display language. Your selected display language will be applied after rebooting.

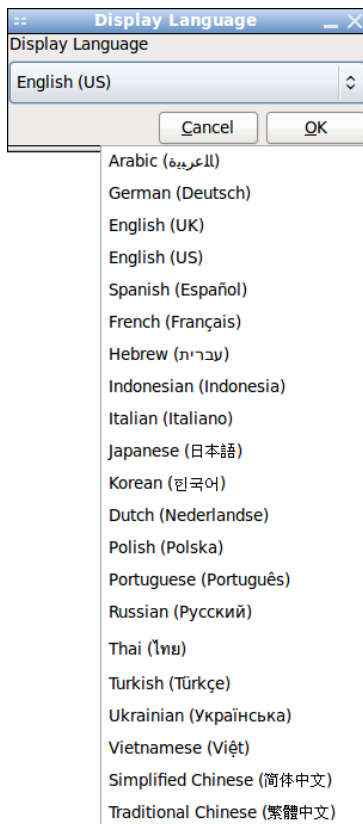


How to set networking connection?

If you do not have IP shared server(direct link), you can select the icon 


and press the right key of your mouse.

1. Show the networking connection status.
2. If you want to set the networking connection, you can press the right key of your mouse to edit it.

Step1 Select the icon  , press the right key of your mouse, then select “Edit Connection...” item.




Step2 Select the connection you want (eg. Wired) and click “+Add” button.

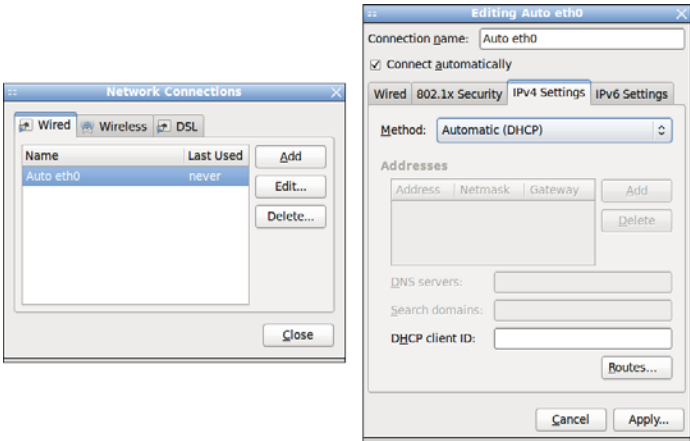

Types of connections

(1) Wired connection

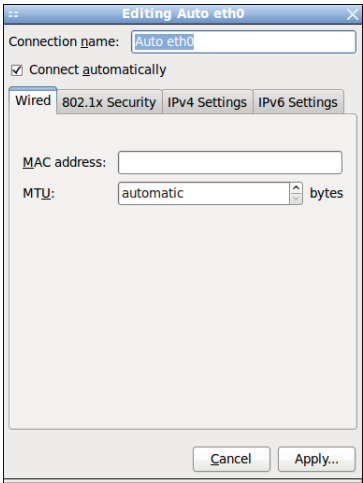

(2) Wireless connection

Editing Wireless connection 1

Connection name: Wireless connection 1

☒ Connect automatically

Wireless Wireless Security IPv4 Settings IPv6 Settings

SSID:

Mode: Infrastructure

BSSID:

MAC address:

MTU: automatic bytes

Cancel Apply

(3) DSL connection

Editing DSL connection 1

Connection name: DSL connection 1

☐ Connect automatically

DSL Wired PPP Settings IPv4 Settings

Username:

Service:

Password:

☐ Show password

Cancel Apply

Note: Details about eJIFFY please refer to eJIFFY in disk.

Memo

Chapter 6

Trouble Shooting

Start up problems during assembly

After assembling the PC for the first time you may experience some start up problems. Before calling for technical support or returning for warranty, this chapter may help to address some of the common questions using some basic troubleshooting tips.

a) System does not power up and the fans are not running.

1. Disassemble the PC to remove the VGA adaptor card, DDR memory, LAN, USB and other peripherals including keyboard and mouse. Leave only the motherboard, CPU with CPU cooler and power supply connected. Turn on again to see if the CPU and power supply fans are running.
2. Make sure to remove any unused screws or other metal objects such as screwdrivers from the inside PC case. This is to prevent damage from short circuit.
3. Check the CPU FAN connector is connected to the motherboard.
4. For Intel platforms check the pins on the CPU socket for damage or bent. A bent pin may cause failure to boot and sometimes permanent damage from short circuit.
5. Check the 12V power connector is connected to the motherboard.
6. Check that the 12V power & ATX connectors are fully inserted into the motherboard connectors. Make sure the latches of the cable and connector are locked into place.

b) Power is on, fans are running but there is no display

1. Make sure the monitor is turned on and the monitor cable is properly connected to the PC.
2. Check the VGA adapter card (if applicable) is inserted properly.
3. Listen for beep sounds. If you are using internal PC speaker make sure it is connected.
 - a. continuous 3 short beeps : memory not detected
 - b. 1 long beep and 8 short beeps : VGA not detected

c) The PC suddenly shuts down while booting up.

1. The CPU may experience overheating so it will shutdown to protect itself. Ensure the CPU fan is working properly.

2. From the BIOS setting, try to disable the Smartfan function to let the fan run at default speed. Doing a Load Optimised Default will also disable the Smartfan.

Start up problems after prolong use

After a prolong period of use your PC may experience start up problems again. This may be caused by breakdown of devices connected to the motherboard such as HDD, CPU fan, etc. The following tips may help to revive the PC or identify the cause of failure.


1. Clear the CMOS values using the CLR_CMOS jumper. Refer to CLR_CMOS jumper in Chapter 2 for Checking Jumper Settings in this user manual. When completed, follow up with a Load Optimised Default in the BIOS setup.
2. Check the CPU cooler fan for dust. Long term accumulation of dust will reduce its effectiveness to cool the processor. Clean the cooler or replace a new one if necessary.
3. Check that the 12V power & ATX connectors are fully inserted into the motherboard connectors. Make sure the latches of the cable and connector are locked into place.
4. Remove the hard drive, optical drive or DDR memory to determine which of these component may be at fault.

Maintenance and care tips

Your computer, like any electrical appliance, requires proper care and maintenance. Here are some basic PC care tips to help prolong the life of the motherboard and keep it running as best as it can.

1. Keep your computer in a well ventilated area. Leave some space between the PC and the wall for sufficient airflow.
2. Keep your computer in a cool dry place. Avoid dusty areas, direct sunlight and areas of high moisture content.
3. Routinely clean the CPU cooler fan to remove dust and hair.
4. In places of hot and humid weather you should turn on your computer once every other week to circulate the air and prevent damage from humidity.
5. Add more memory to your computer if possible. This not only speeds up the system but also reduces the loading of your hard drive to prolong its life span.
6. If possible, ensure the power cord has an earth ground pin directly from the wall outlet. This will reduce voltage fluctuation that may damage sensitive devices.

Basic Troubleshooting Flowchart

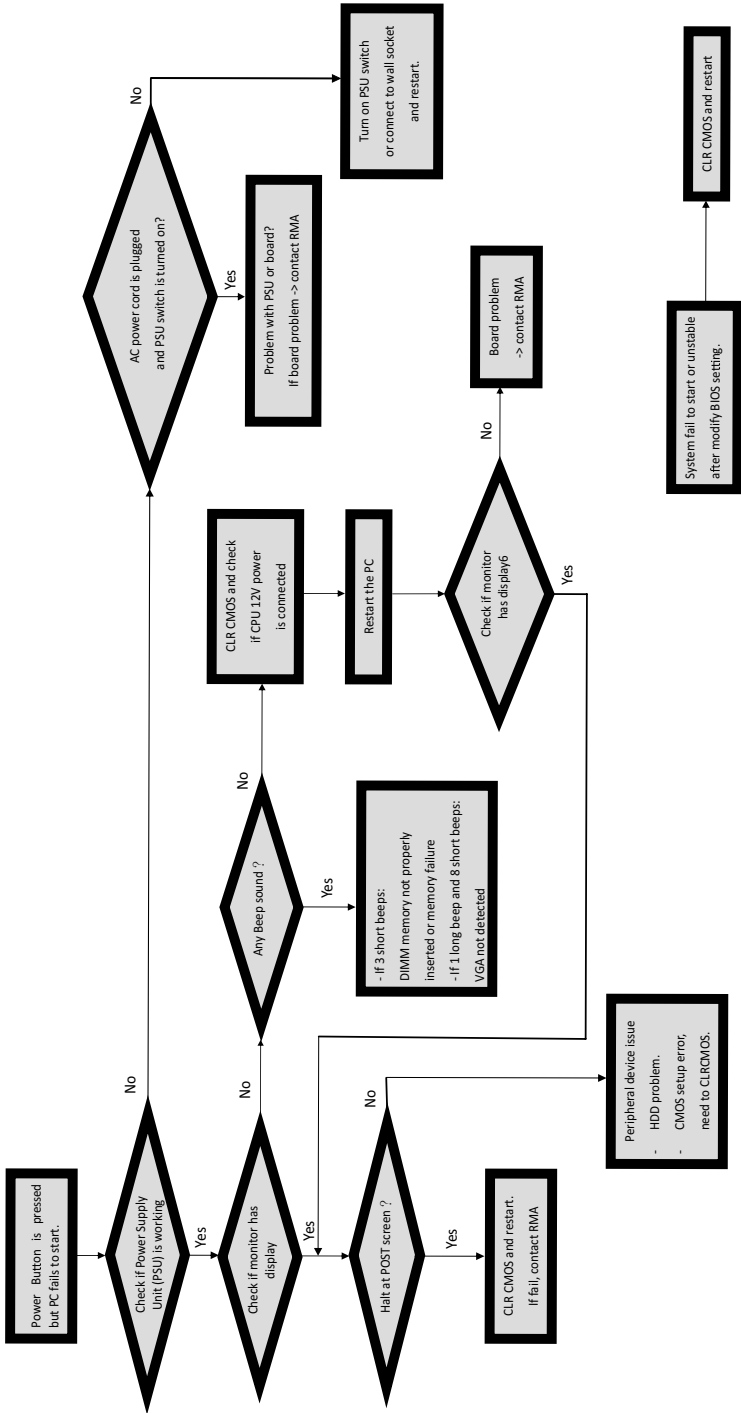

Memo